

- Robust poppet valve technology
- Very high control precision and dynamics
- Suitable for a wide range of applications
- High air flow rates
- ED07 supports different types of connectivity from Analog Version to Fieldbus connection via EtherCAT

## AVENTICS ED07 Dynamic Direct Acting Pressure Regulator

The AVENTICS Series ED07 offers proportional pressurization and the exhaust valves are controlled separately to deliver dynamic control for the most demanding applications.

Highly dynamic proportional pressure regulator


Stackable with base plate

Nominal width 7

Flow 1300 l/min

Pressure range -1 ... 20 bar

EtherCAT, AES fieldbus connection



## Technical data

|                          |                                                   |
|--------------------------|---------------------------------------------------|
| Type                     | Potentiometer control without actual output value |
| Control                  | Directly controlled                               |
| Control                  | Analog                                            |
| Function                 | Air exhaust                                       |
| Output signal            | Analog                                            |
|                          | Switch output                                     |
| Operational voltage DC   | 24 V                                              |
| Max. current consumption | 1400 mA                                           |
| Nominal input value      | 0 ... 10 V                                        |
| Min. regulation range    | 0 bar                                             |
| Max. regulation range    | 16 bar                                            |
| Min. working pressure    | 0.5 bar                                           |
| Max. working pressure    | 18 bar                                            |
| Hysteresis               | 0,04 bar                                          |
| Medium                   | Compressed air                                    |
| Nominal flow Qn          | 1300 l/min                                        |
| Min. ambient temperature | 5 °C                                              |
| Max. ambient temperature | 50 °C                                             |
| Min. medium temperature  | 5 °C                                              |
| Max. medium temperature  | 50 °C                                             |

# E/P pressure regulator, Series ED07

R414000777

Series

ED07

2025-05-09

|                                       |                                                          |
|---------------------------------------|----------------------------------------------------------|
| Protection class                      | IP65                                                     |
| Permissible ripple                    | 5%                                                       |
| Max. particle size                    | 50 µm                                                    |
| Max. oil content of compressed air    | 1 mg/m <sup>3</sup>                                      |
| Type                                  | Poppet valve                                             |
| Mounting orientation                  | $\alpha = 0 \dots 90^\circ \pm \beta = 0 \dots 90^\circ$ |
| Certificates                          | CE declaration of conformity                             |
| Electrical connection type            | Plug                                                     |
| Electrical connection size            | M12                                                      |
| Electrical connection number of poles | 5-pin                                                    |
| Signal connection                     | input and output                                         |
| Signal connection                     | Socket                                                   |
| Signal connection                     | M12                                                      |
| Signal connection                     | 5-pin                                                    |
| Industry                              | Industrial                                               |
| Weight                                | 2.05 kg                                                  |

## Material

|                  |                                             |
|------------------|---------------------------------------------|
| Housing material | Die-cast aluminum<br>Steel, chrome-plated   |
| Seal material    | Hydrogenated acrylonitrile butadiene rubber |
| Part No.         | R414000777                                  |

## Technical information

With oil-free, dry air, other installation positions are possible on request.

The protection class is only ensured when the plug is mounted properly. For detailed information, see operating instructions.

Minimum working pressure = 0.5 bar + max. required secondary pressure

Additional pressure setting ranges available on request

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).


# E/P pressure regulator, Series ED07

R414000777

Series  
ED07

2025-05-09


## Dimensions

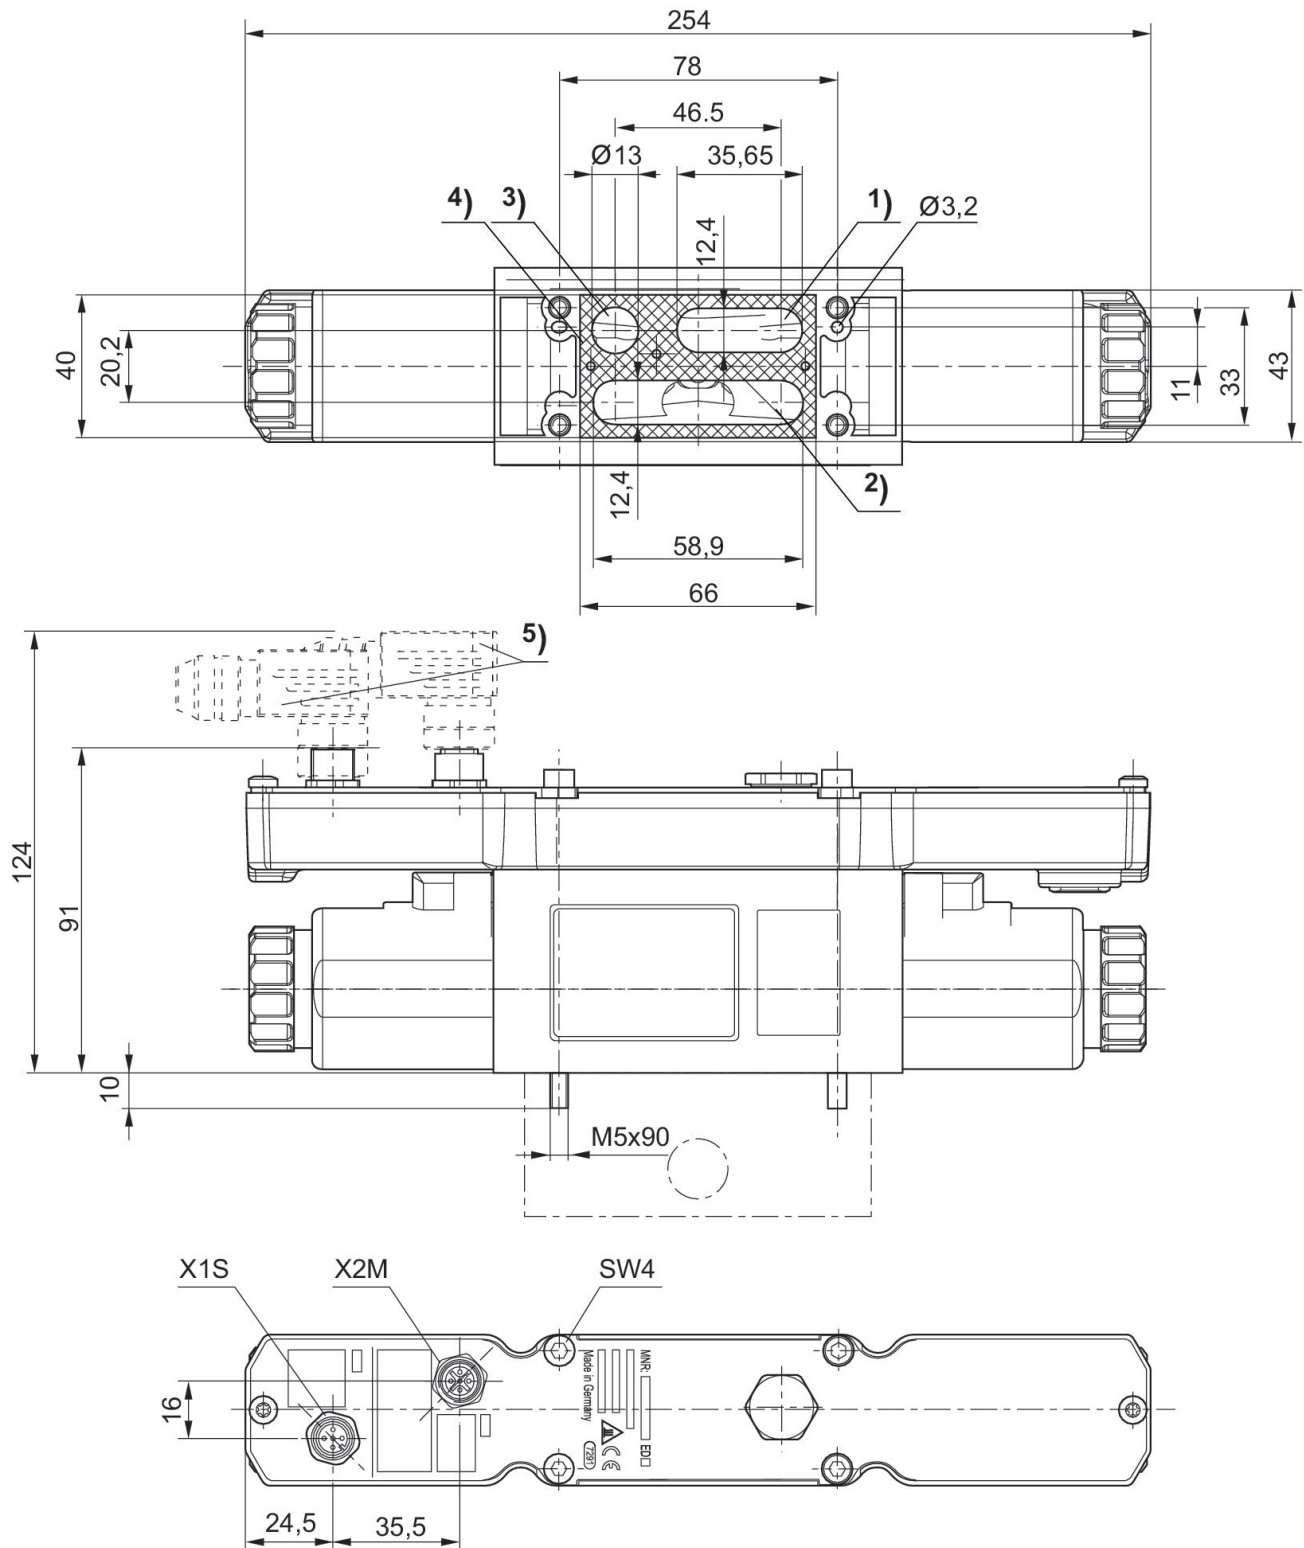


- 1) Operating pressure
- 2) Working pressure
- 3) Exhaust
- 4) Profile seal
- 5) Accessories not supplied

## Mounting orientation

$$\beta = \pm 0 \dots 90^\circ$$

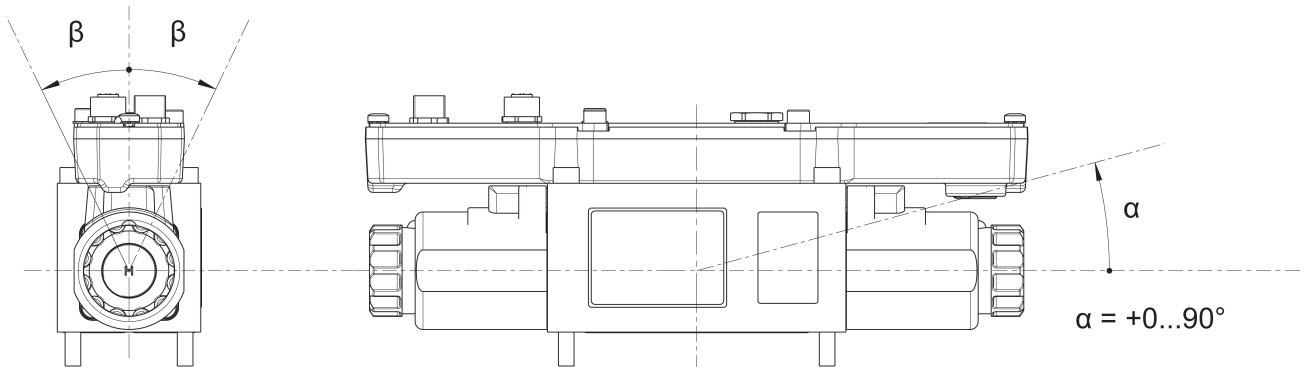

## Functional diagram

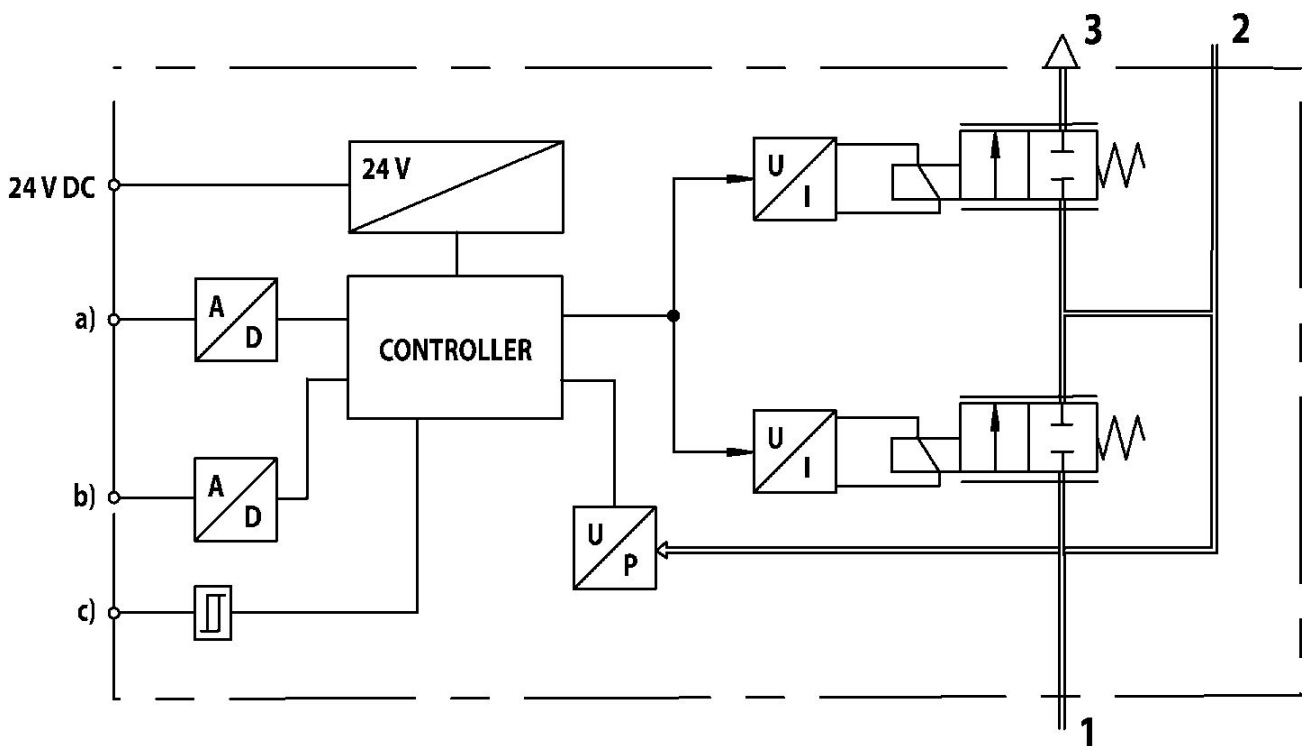


a) Nominal input value b) Actual output value c) Switch output (acknowledge signal) The E/P pressure control valve modulates the pressure corresponding to an analog electrical nominal input value.

1) Operating pressure

- 1) Operating pressure
- 2) Working pressure


3) Exhaust

## Characteristic and pin assignment for potentiometer control without actual output value

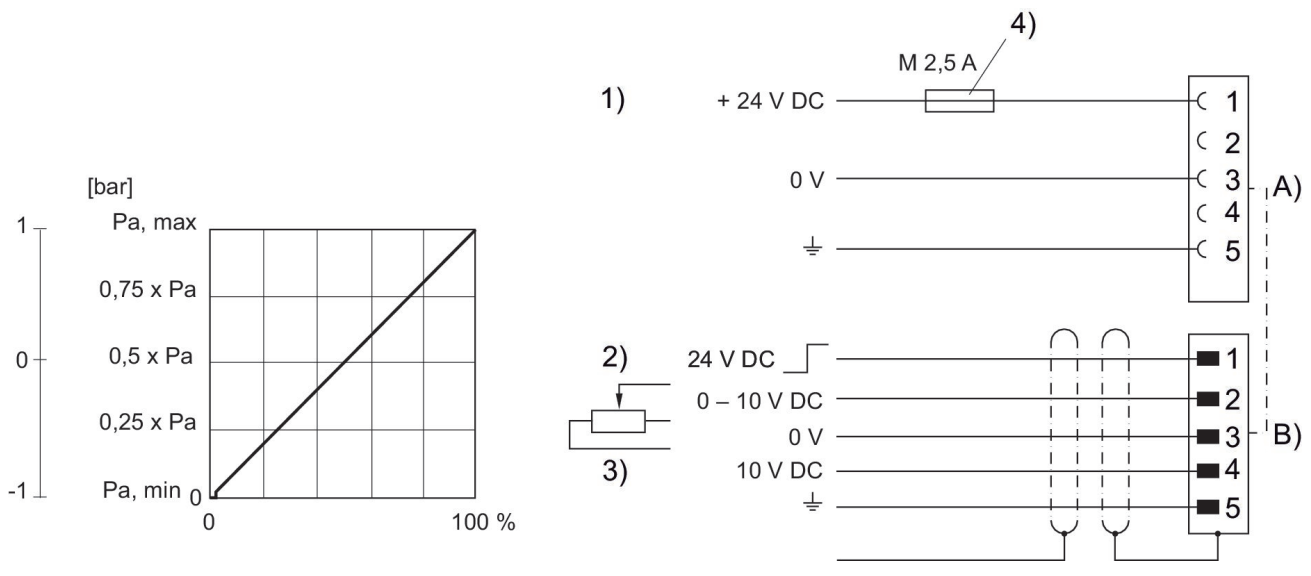

- 1) Supply Voltage
- 2) Switch output (pin 1) and nominal value (pin 2) are related to 0 V.
- 3) Potentiometer control (min. 0-2 kΩ, max. 0-10 kΩ)
- 4) The operating voltage must be protected by an external M 2.5 A fuse. Connect plug X2M via a shielded cable to ensure EMC. A) Plug X1S B) Plug X2M

## Flow diagram

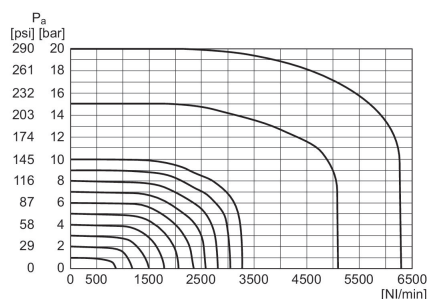

Pa = Working pressure