

Base plate

R414006058

2024-12-12



Technical data

Industry

Type

For series

Type

Compressed air connection input

Compressed air connection output

Port exhaust

Medium

Protection class

Weight

Material

Material base plate

Seal material

Part No.

Industrial

Base plate

CL03, HF03-LG

HF02-LG

5 push-in fittings

G 1/4

G 1/4

G 1/4

Compressed air

IP69K

0.175 kg

Polyamide fiber-glass reinforced

Hydrogenated acrylonitrile butadiene rubber

R414006058

Base plate

R414006058

2024-12-12

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

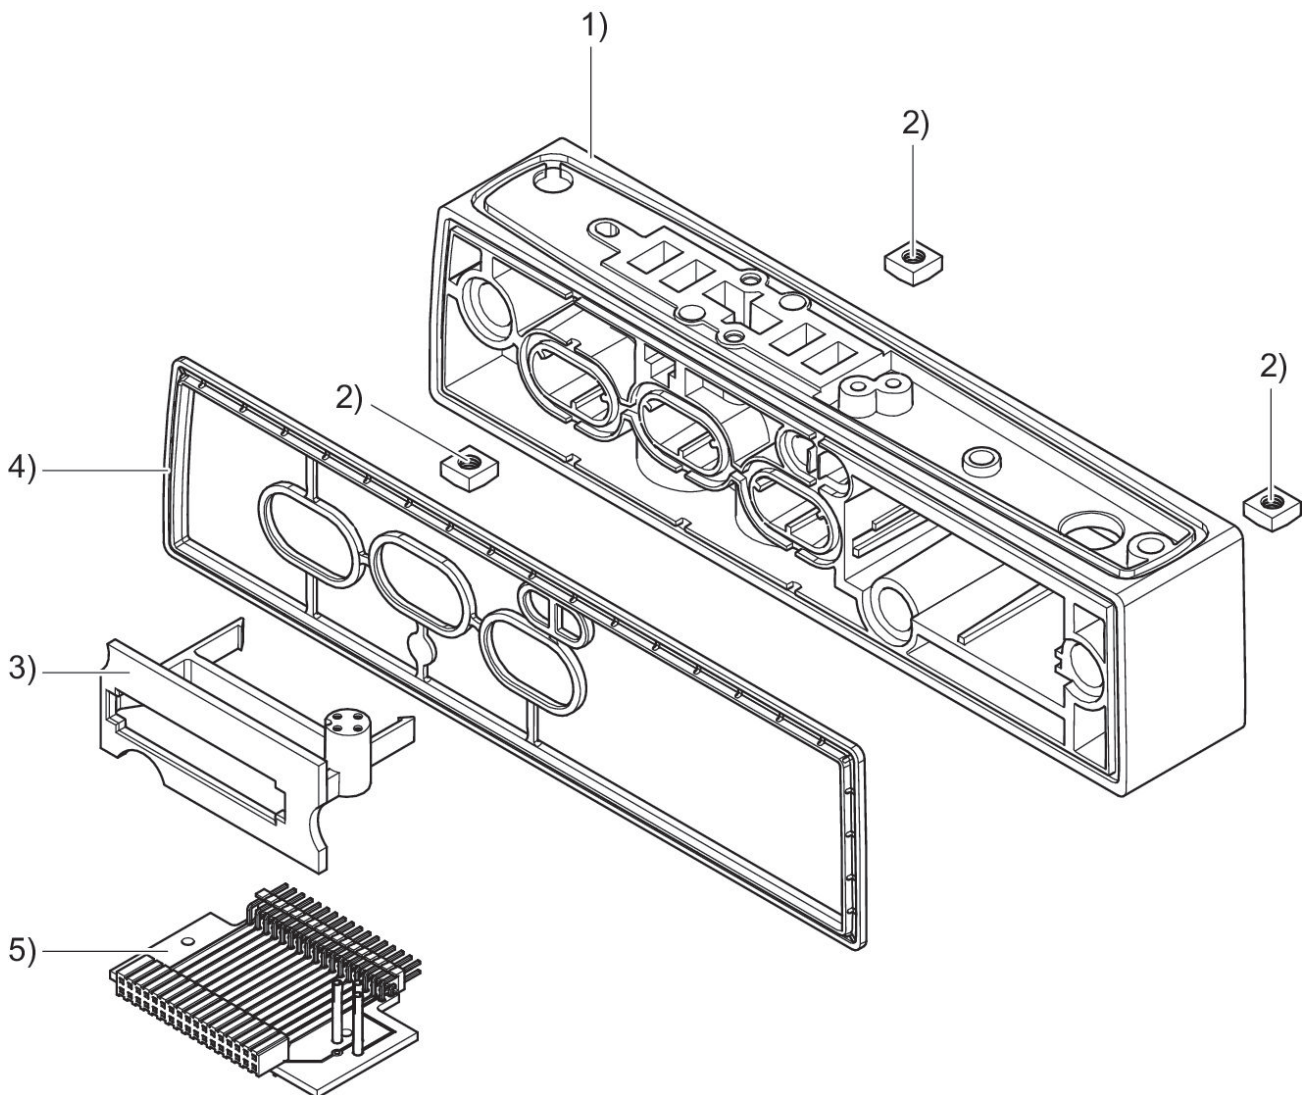


1) Subbase 2) plug 3) circuit board holder 4) seal 5) circuit board

Base plate

R414006058

2024-12-12

Fig. 2
CL03, HF02-LG

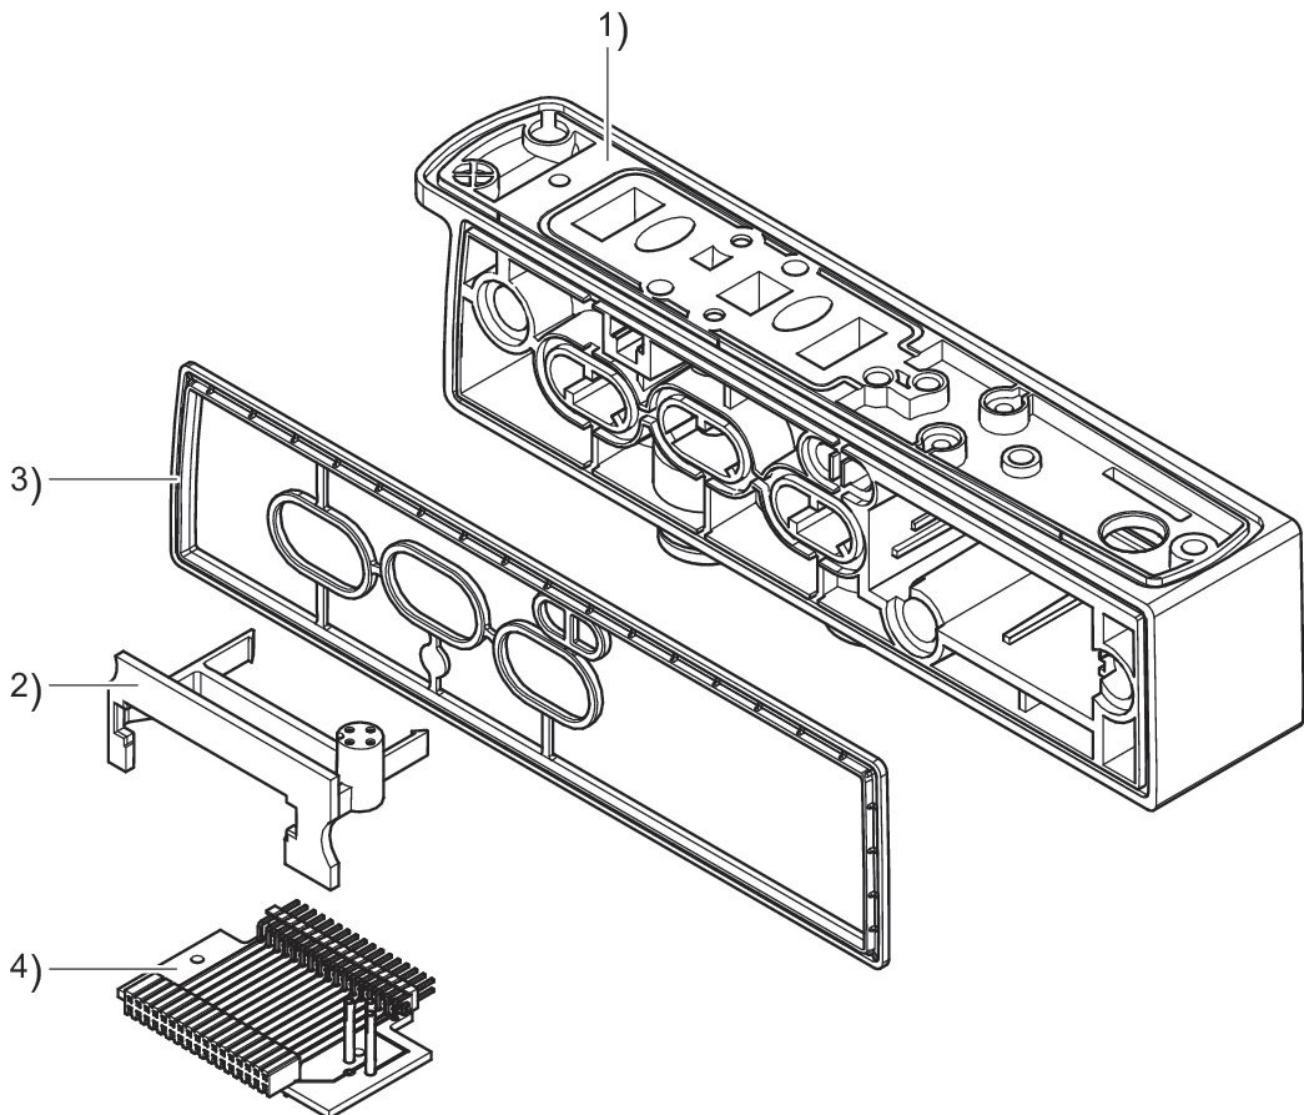

1) Subbase 2) Circuit board holder 3) Seal 4) Circuit board