


AVENTICS Series TU2 Compressed air tubings

AVENTICS Series TU2 Duo plastic tubing in PUR are suitable for dynamic laying and can be partially or continuously bonded.

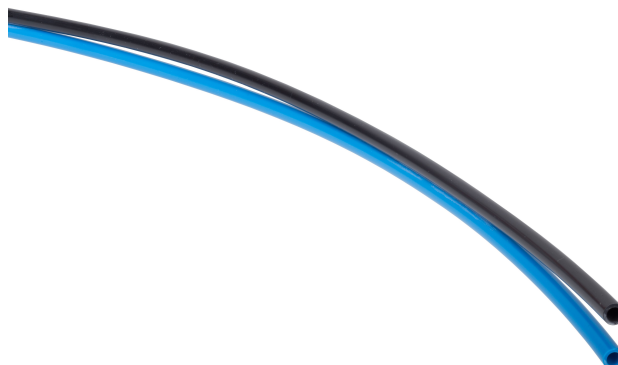

Technical data

Industry	Industrial
Note	Partially bonded
External Ø	4 mm
Wall thickness	0.75 mm
Bending radius min. at 20 °C	12 mm
Color	Black, transparent
Min. ambient temperature	-30 °C
Max. ambient temperature	80 °C
Max. working pressure at [[20]°C]	10 bar
Delivery unit length	100 m
Weight per meter	0.018 kg
Material	Polyester polyurethane
Part No.	R414010294

Technical information

Halogen-free
Suitable for dynamic laying