#### R414010395

#### **Series PG1 Pressure gauges**

With the AVENTICS Series PG1 you can visualize and rely on a clear air pressure display for each of your pneumatic circuits. In addition to the parameters for controlling the air quality, supplying sufficient pressure is the basis for operating a reliable system within machine automation. Emerson offers mechanical pressure gauges that can be integrated into machines for diverse applications and air preparation systems. The specifications of the individual versions in the universal PG1 Series provide a selection of options, such as appearance, material, or the required type of mounting.





#### Technical data

Industry Industrial

Pressure gauge version Bourdon tube pressure gauge

Back port

with adjustable work area display

Standardization EN 837-1

Class 1,6

Compressed air connection G 1/4
Nominal diameter 63 mm

Scale value 0.2

Min. range of application 0 bar

Max. range of application 4 bar

Min. display range 0 bar

Max. display range 6 bar

Min. working pressure 0 bar

Max. working pressure 10 bar

Min. ambient temperature -40 °C Max. ambient temperature 60 °C

Medium Compressed air

Background color Black
Main scale unit (outside) bar

R414010395

Main scale color (outside)	Green
Secondary scale unit (inside)	psi
Secondary scale color (inside)	White
Work Area Display, Color	Red Green
Pointer color	White
Weight	0.09 kg

## Material

Housing material Acrylonitrile butadiene styrene

Material viewing window Polystyrene


Material thread Brass

R414010395

## Technical information

To set the operating range, the cover (inspection glass) must be removed. To do this, carefully lift the inspection glass by inserting a pointed or flat object in the slot provided for this purpose on the housing circumference.

# **Dimensions**

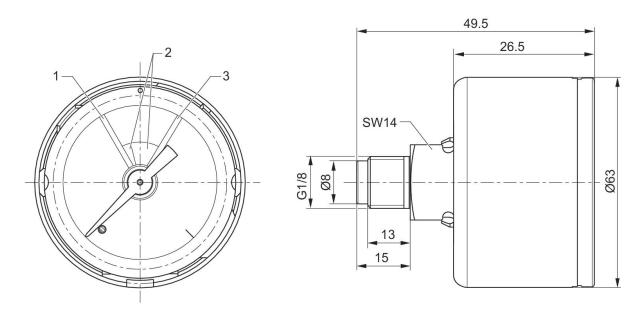

1 = red 2 = green 3 = red