


AVENTICS Series TU2 Compressed air tubings

Polyester polyurethane, Polyether polyurethane, Polyvinyl chloride, Polytetrafluorethylene, Flamex, Polyamide, Polyethylene

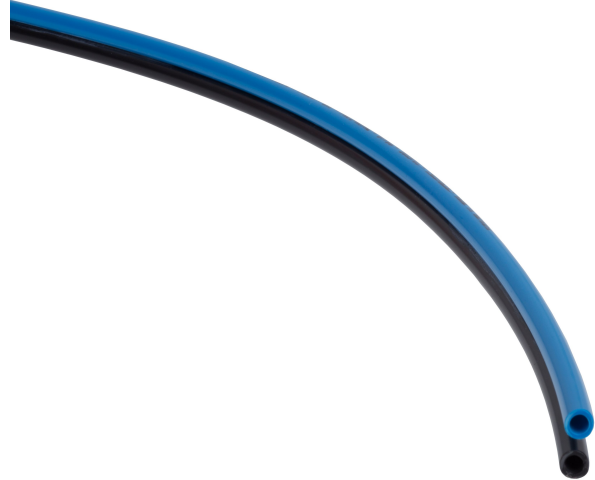

Technical data

Industry

Note

External Ø

Wall thickness

Bending radius min. at 20 °C

Color

Min. ambient temperature

Max. ambient temperature

Max. working pressure at [[20]°C]

Delivery unit length

Material

Part No.

Industrial

suitable for dynamic laying

Continuously bonded

4 mm

0.75 mm

12 mm

Black, transparent

-30 °C

80 °C

10 bar

100 m

Polyester polyurethane

R414010613

Technical information

External calibrated

Suitable for dynamic laying

Halogen-free