

Blanking plate

R422102462



Technical data

Industry
Industrial

Type
Blanking plate

For series
AV03

Delivery unit
1 piece

Working pressure min.
-0.9 bar

Working pressure max
10 bar

Min. ambient temperature
-10 °C

Max. ambient temperature
60 °C

Min. medium temperature
-10 °C

Type

Blanking plate

Pilot control exhaust

With collective pilot air exhaust

Max. medium temperature
60 °C

Medium
Compressed air

Max. particle size
40 µm

Oil content of compressed air min.
0 mg/m³

Oil content of compressed air max.
5 mg/m³

Protection class
IP65
Mounting screw
Hexalobular socket (TORX) ISO 10664-8

Tightening torque for mounting screws
0.7 Nm
Weight
0.028 kg

Material

Housing material
Polyarylamide, fiber-glass reinforced
Screws material
Steel

Surface screws
galvanized
Part No.
R422102462

Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in <https://www.emerson.com/en-us/support>).

Dimensions

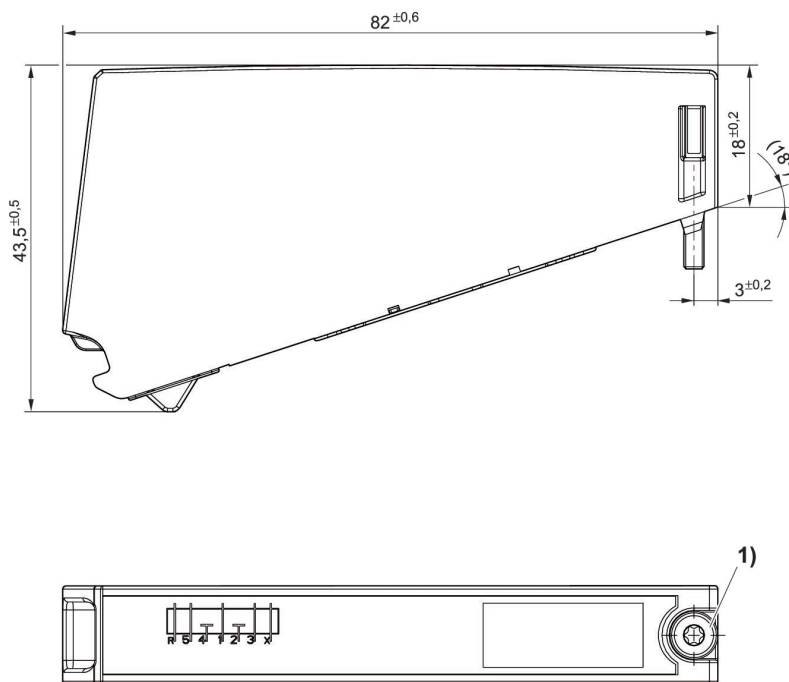

1) Mounting screw