

Technical data

Industry	Industrial
Type	Blanking plate
For series	AV05
Pilot control exhaust	With collective pilot air exhaust
Delivery unit	1 piece
Min. working pressure	-0.9 bar
Max. working pressure	10 bar
Min. ambient temperature	-10 °C
Max. ambient temperature	60 °C
Min. medium temperature	-10 °C
Max. medium temperature	60 °C
Medium	Compressed air
Max. particle size	40 µm
Min. oil content of compressed air	0 mg/m ³
Max. oil content of compressed air	5 mg/m ³
Protection class	IP65
Mounting screw	Hexalobular socket (TORX) ISO 10664-8

Blanking plate

2024-08-07

R422102526

Tightening torque for mounting screws	0.5 Nm
Weight	0.03 kg

Material

Screws material	Steel, chrome-plated
Surface screws	galvanized
Part No.	R422102526

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.



Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Blanking plate

2024-08-07

R422102526

Dimensions

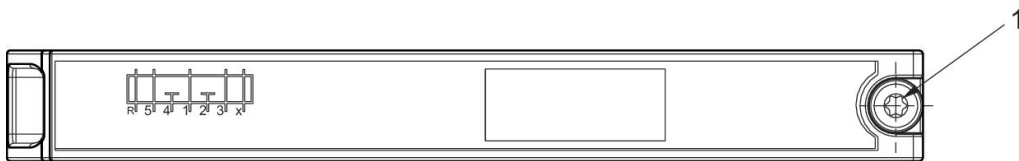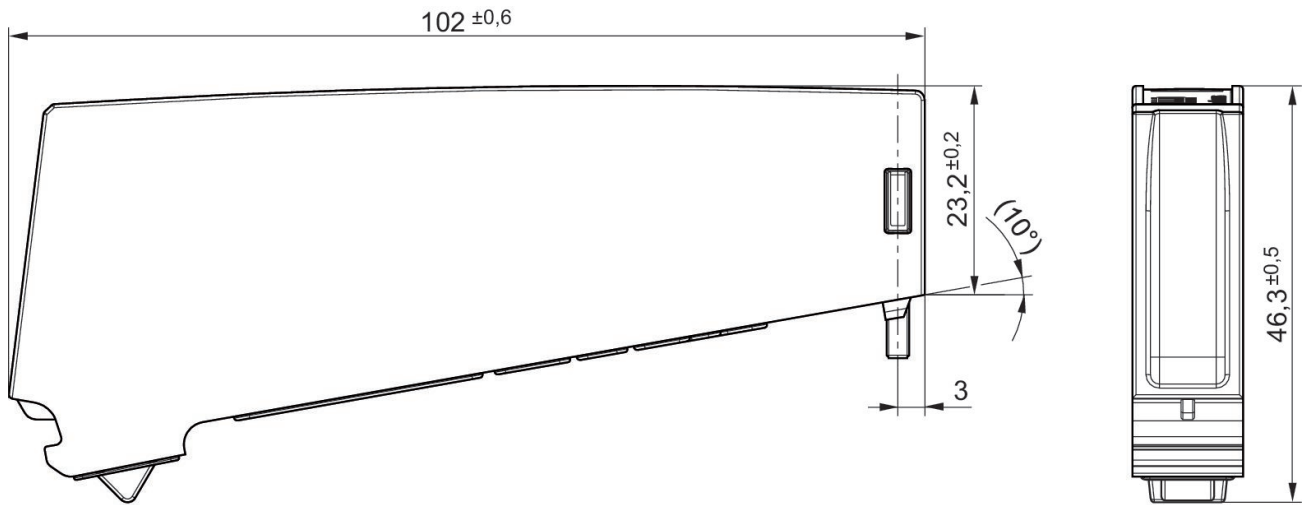

1) Mounting screw