


Blanking plate

R422102718

2024-08-07

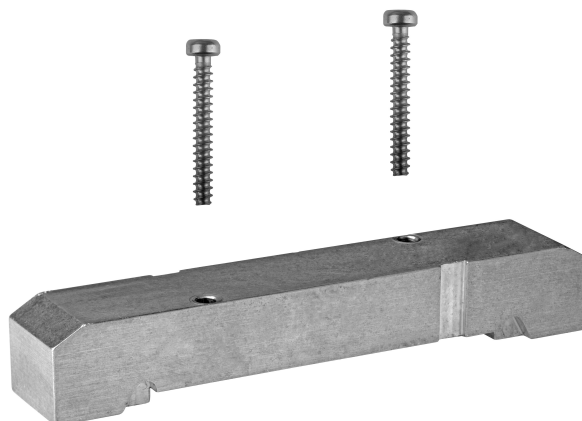

Technical data

Industry

Industrial

Type

Blanking plate

For series

ES05

Delivery unit

1 piece

Min. ambient temperature

5 °C

Max. ambient temperature

50 °C

Min. medium temperature

5 °C

Max. medium temperature

50 °C

Mounting screw

Hexalobular socket (TORX) ISO 10664-10

Tightening torque for mounting screws

0.9 Nm

Material

Housing material

Aluminum

Screws material

Steel, chrome-plated

Part No.

R422102718

Blanking plate

2024-08-07

R422102718


Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

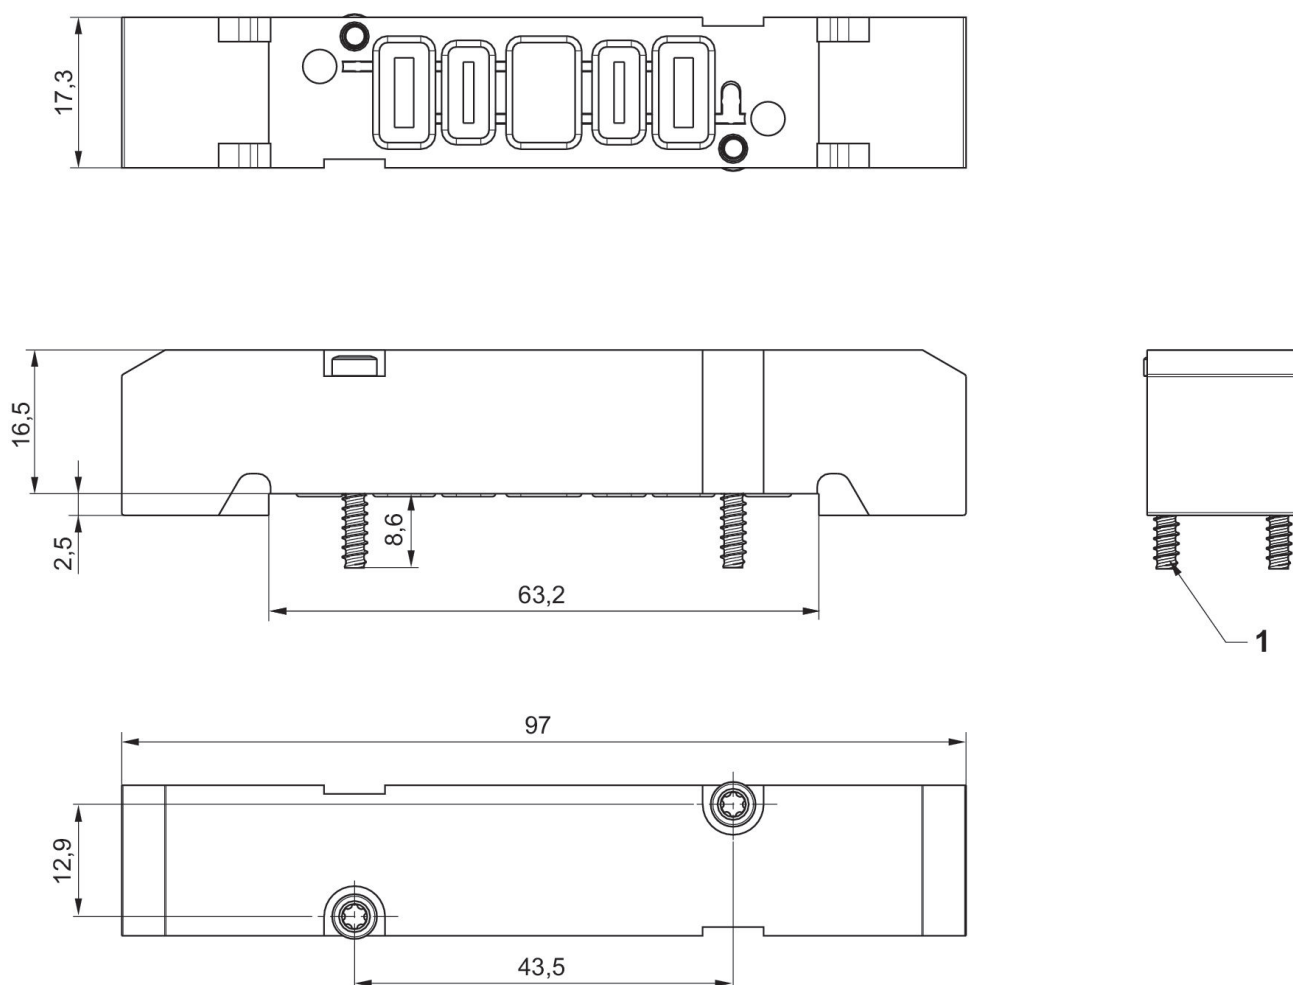

1) Screws for plastic Ø3