


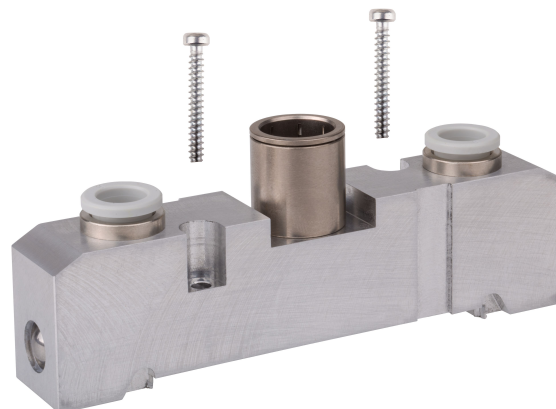

Technical data

Industry	Industrial
Type	Base plate
For series	ES05
Compressed air connection input	Ø 12
Port exhaust	Ø 8
Delivery unit	5 piece
Min. working pressure	0 bar
Max. working pressure	8 bar
Min. ambient temperature	5 °C
Max. ambient temperature	50 °C
Min. medium temperature	5 °C
Max. medium temperature	50 °C
Medium	Compressed air
Mounting screw	Hexalobular socket (TORX) ISO 10664-10
Tightening torque for mounting screws	0.9 Nm

Material

Housing material

Aluminum

Screws material

Steel, chrome-plated

Part No.

R422P02809


Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Dimensions

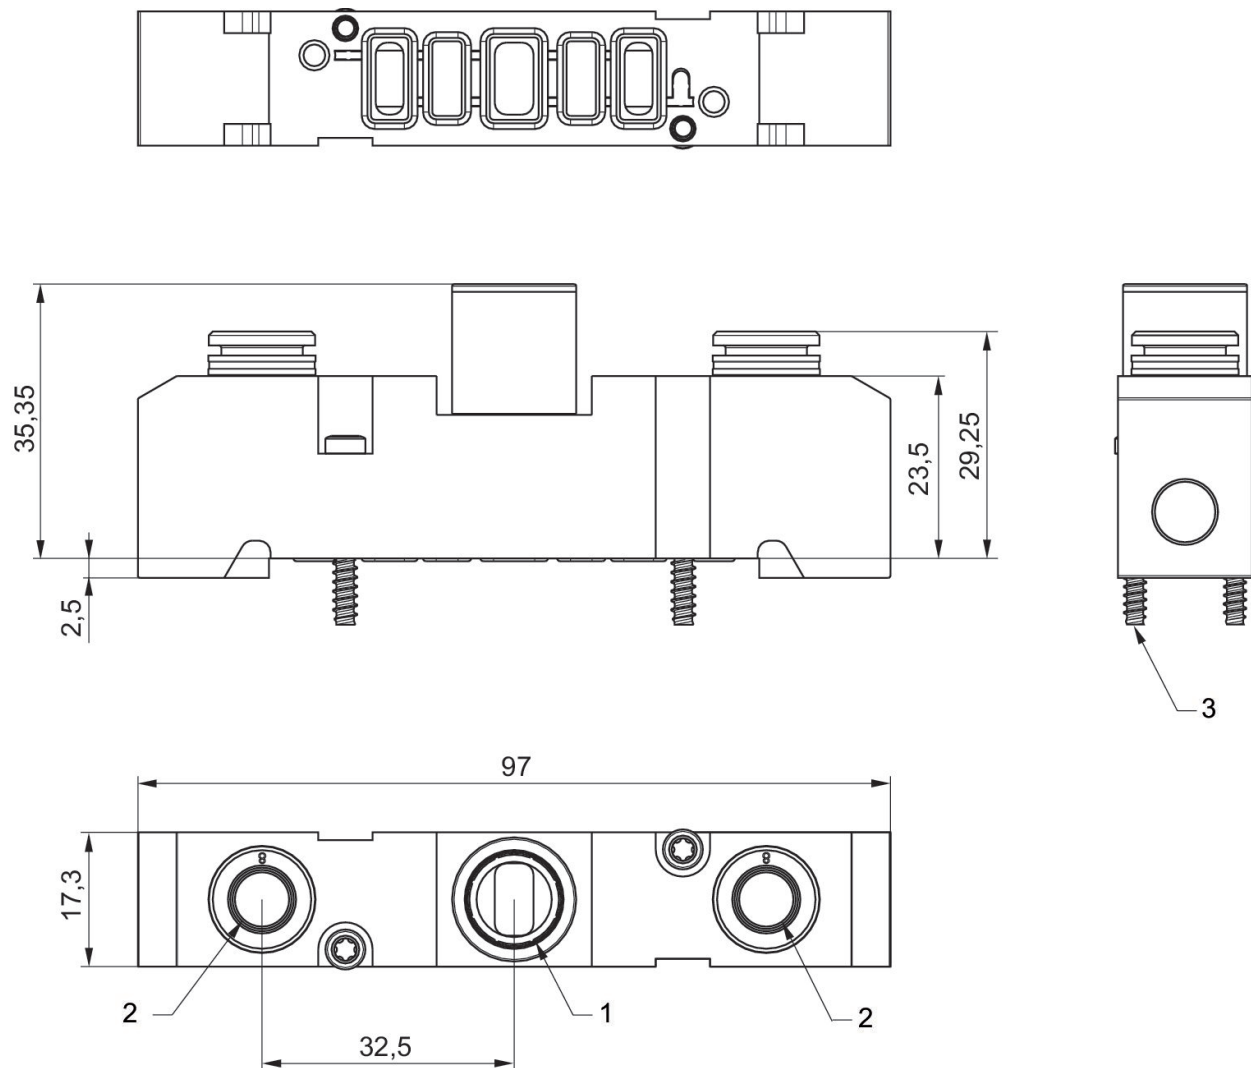

- 1) input [1] Ø 12
- 2) Output [3/5]: Ø8
- 3) Screws for plastic Ø3