


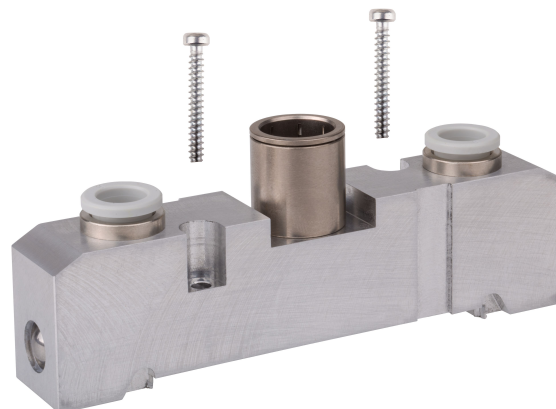

Technical data

Industry

Industrial

Type

Base plate

For series

ES05 -inch

Compressed air connection input

Ø 3/8

Port exhaust

Ø 3/8

Delivery unit

5 piece

Min. working pressure

0 bar

Max. working pressure

8 bar

Min. ambient temperature

5 °C

Max. ambient temperature

50 °C

Min. medium temperature

5 °C

Max. medium temperature

50 °C

Medium

Compressed air

Mounting screw

Hexalobular socket (TORX) ISO 10664-10

Tightening torque for mounting screws

0.9 Nm

Material

Seal material	Aluminum
Screws material	Steel, chrome-plated
Part No.	R422P02810

Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

Supply plate

R422P02810

2024-08-07

Dimensions

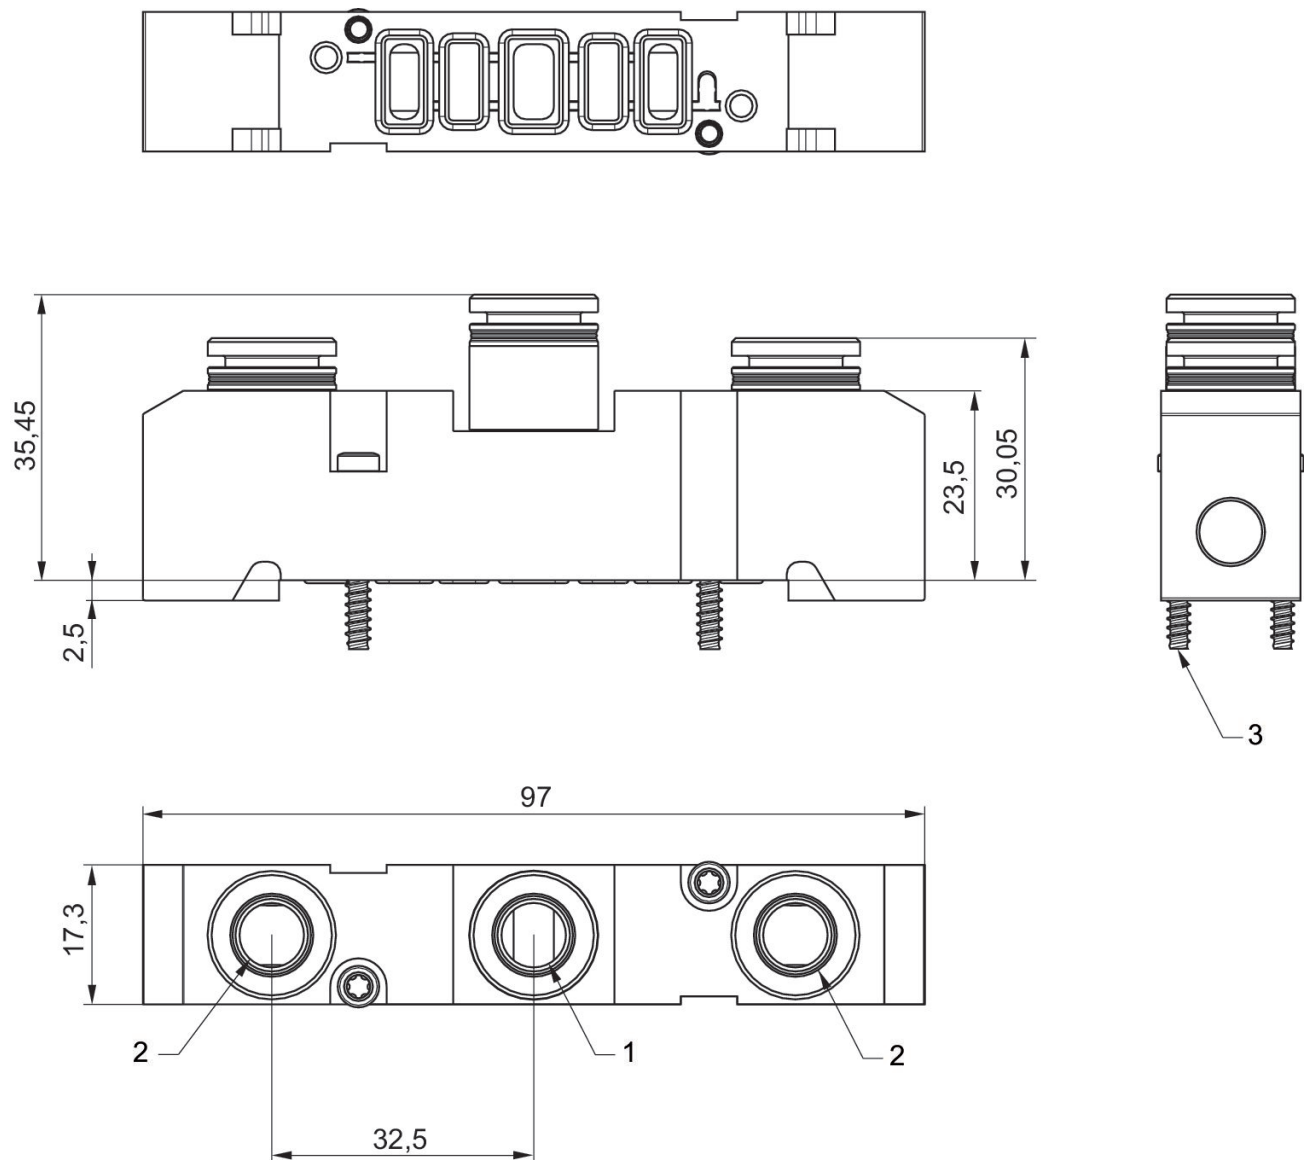

- 1) input [1] Ø 3/8
- 2) Output [3/5]: Ø3/8
- 3) Screws for plastic Ø3