

3/2-directional valve, Series A-Pilotair®

R431005632

General series information
AVENTICS Series A-Pilotair Directional valves

- manually operated



Technical data

Industry

Industrial

Type

Triple (2-HA-3), 3-way valves - 5-position gated
single handle
Short handle

Activation

Manual

Nominal flow Q_n

1308.72 l/min

Compressed air connection output

Ø 1/4"

Working pressure min.

0 bar

Working pressure max.

13.7 bar

Sealing principle

Soft Seal

Type

Poppet valve

Type

2-HA-4

Control pressure min.

0 bar

Control pressure max.

17.2 bar

Min. ambient temperature

-40 °C

Max. ambient temperature

71 °C

Min. medium temperature

-40 °C

Max. medium temperature

71 °C

Medium

Compressed air

Oil content of compressed air min.	0 mg/m ³
Oil content of compressed air max.	1 mg/m ³
Max. particle size	50 µm
Compressed air connection input	Ø 1/4"
Weight	1.81 kg
Housing material	Die-cast aluminum
Part No.	R431005632

Technical information

The 2-HA-3 and 2-HA-4 models are an extension of the 2-HA-2 models. They were created to furnish a housing that will operate up to four 3-way valves to provide a variety of functions.

These valves were designed primarily for use with multi position cylinders for Transmission Controls. They also meet the application requirements for two different supply pressures, selector functions and directional control of up to four different circuits.


Double handle assemblies are provided for space conservation and for applications requiring two handles located adjacent to each other. Thus, two different functions can be controlled. As an example, the left handle can control direction (forward or reverse) and the right handle, range (1st, 2nd, 3rd and 4th gear).

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

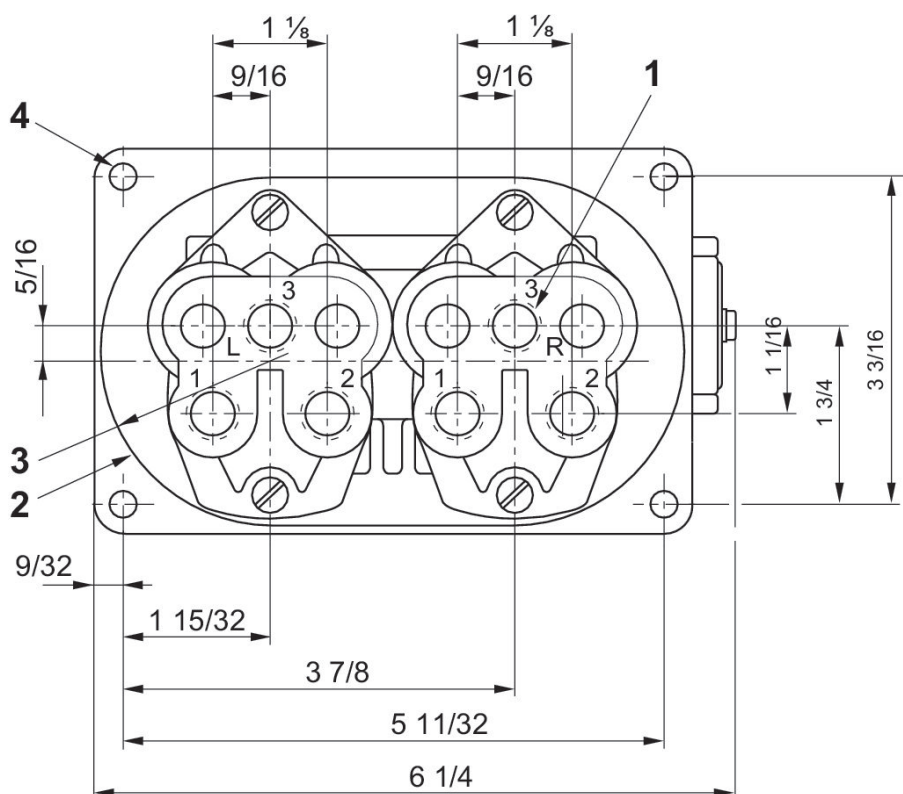[illegible]

- 

3) 1/4 - 18 NPTF 6 ports
4) 9/32 diameter (4) places

3-position handle, detented

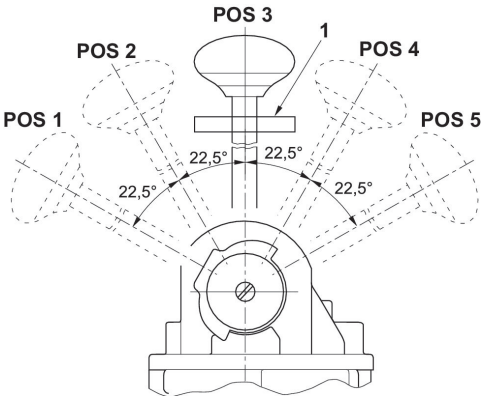

Handle position

Handle position		1	2	3	4	5
Out Port Supplied	OUT port 1L				X	X
Out Port Supplied	OUT port 2L	X	X			
Out Port Supplied	OUT port 1R	X			X	
Out Port Supplied	OUT port 2R		X			X