

QR1-S-RMS standard series

R432000113

2026-03-04

AVENTICS Series QR1 Fittings

AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



Technical data

Industry

Note

Fitting type

Compressed air connection type

Port G

Compressed air connection type 2

Port D

Compressed air connection type 3

Compressed air connection 3

Type

Min. working pressure

Max. working pressure

Min. ambient temperature

Max. ambient temperature

Delivery quantity

Weight

Industrial

Archive product: Do not use in new constructions!

3x push-in fitting, reducing
pin bushing

Ø5/32

Push-in fitting

Ø1/4

Push-in fitting

Ø5/32

QR1-S-RMS

-0.95 bar

16 bar

-20 °C

80 °C

10 piece

0.014 kg

QR1-S-RMS standard series

R432000113

2026-03-04

Material


Housing material	Polyamide
Seal material	Acrylonitrile butadiene rubber
Material tooth lock washer	Stainless Steel
Material release ring	Polyamide
Material release ring holder	Die cast zinc
	Brass
Surface release ring holder	nickel-plated
Part No.	R432000113

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined.

These pneumatic components with NPT or inch thread dimensions are only available from our US sales organization.

Dimensions in inches

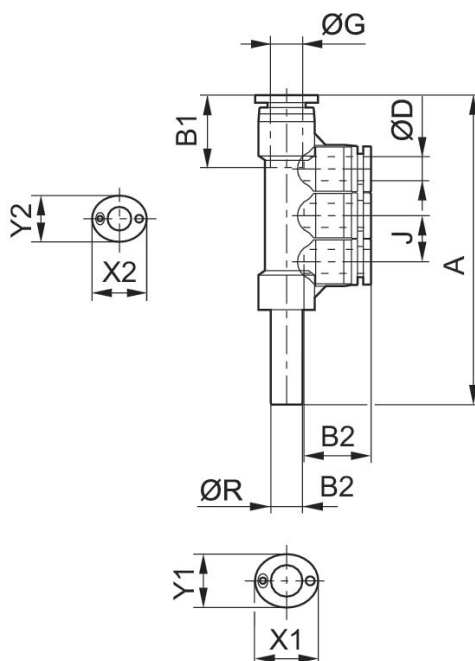

Dimensions in inches

Part No.	Port R	Port D	Port G	A	B1	B2	J	X1	Y1	X2
R432000113	Ø5/32	Ø1/4	Ø5/32	2.98	0.73	0.71	0.39	0.55	0.473	0.47
R432000117	Ø5/32	Ø5/16	Ø5/32	3.08	0.73	0.63	0.39	0.63	0.552	0.47
R432000115	Ø1/4	Ø5/16	Ø1/4	3.24	0.73	0.67	0.47	0.63	0.552	0.55
R432000114	Ø5/16	Ø3/8	Ø5/16	4.12	0.83	0.73	0.55	0.75	0.67	0.63

QR1-S-RMS standard series

R432000113

2026-03-04

Part No.	Y2
R432000113	0.39
R432000117	0.39
R432000115	0.47
R432000114	0.55