

QR1-S-RVT standard series

R432000243

2025-04-24

AVENTICS Series QR1 Fittings

AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.



Technical data

Industry	Industrial
Fitting type	Elbow fitting
Compressed air connection type	External thread
Port G	10-32 UNF
Compressed air connection type 2	Push-in fitting
Port D	Ø5/32
Type	QR1-S-RVT
Min. working pressure	-0.95 bar
Max. working pressure	16 bar
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Delivery quantity	10 piece
Weight	0.005 kg

Material

Housing material	Polyamide
Seal material	Acrylonitrile butadiene rubber
Material tooth lock washer	Stainless Steel
Material release ring	Polyamide
Material release ring holder	Die cast zinc
	Brass
Surface release ring holder	nickel-plated
Material thread	Brass
Surface thread	nickel-plated

QR1-S-RVT standard series

R432000243

2025-04-24

Part No.

R432000243


Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

Thread seal with captive O-ring

These pneumatic components with NPT or inch thread dimensions are only available from our US sales organization.

Dimensions in inches

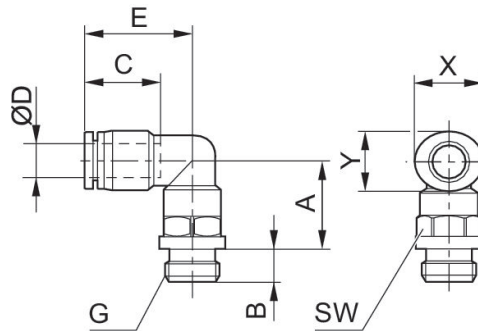

Dimensions in inches

Part No.	Port D	Port G	A	B	C	E	SW	X	Y
R432000243	Ø5/32	10-32 UNF	0.65	0.22	0.63	0.71	5/16	0.47	0.39
R432000232	Ø1/4	10-32 UNF	0.69	0.22	0.67	0.81	5/16	0.55	0.47
R432000245	Ø5/32	1/8 NPT	0.65	0.32	0.63	0.71	7/16	0.47	0.39
R432000234	Ø1/4	1/8 NPT	0.67	0.32	0.67	0.81	7/16	0.55	0.47
R432000241	Ø5/16	1/8 NPT	0.75	0.32	0.73	0.89	7/16	0.63	0.55
R432002637	Ø 3/8	1/8 NPT	0.94	0.31	0.83	1.03	11/16	0.67	0.75
R432000244	Ø5/32	1/4 NPT	0.65	0.43	0.63	0.71	9/16	0.47	0.39
R432000233	Ø1/4	1/4 NPT	0.71	0.43	0.67	0.81	9/16	0.55	0.47
R432000240	Ø5/16	1/4 NPT	0.79	0.43	0.73	0.89	9/16	0.63	0.55
R432000237	Ø 3/8	1/4 NPT	0.94	0.43	0.83	1.03	19/32	0.75	0.67
R432000230	Ø1/2	1/4 NPT	1.02	0.43	0.89	1.15	19/32	0.91	0.83
R432000235	Ø1/4	3/8 NPT	0.75	0.47	0.67	0.81	11/16	0.55	0.47
R432000242	Ø5/16	3/8 NPT	0.79	0.47	0.73	0.89	11/16	0.63	0.55
R432000238	Ø 3/8	3/8 NPT	0.94	0.47	0.83	1.03	11/16	0.75	0.67
R432000231	Ø1/2	3/8 NPT	1.02	0.47	0.89	1.15	11/16	0.91	0.83
R432000239	Ø5/16	1/2 NPT	0.83	0.59	0.73	0.89	7/8	0.63	0.55
R432000236	Ø 3/8	1/2 NPT	0.94	0.59	0.83	1.03	7/8	0.75	0.67
R432000229	Ø1/2	1/2 NPT	1.02	0.59	0.89	1.15	7/8	0.91	0.83