


AVENTICS Series QR1 Fittings

AVENTICS Series QR1 push-in connectors with easy, secure mounting are available in many versions: for tubing diameters from 3 to 16 mm, as well as in plastic, metal, and stainless steel variants. QR1 Series offers a cylindric thread that allows repeated connection and release without problems (Quick Release) and captive O-ring guarantees an optimal sealing. Our QR program offers the right solution for every application and industry.

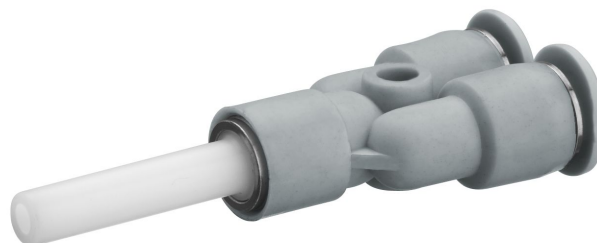

Technical data

Industry

Note

Fitting type

Compressed air connection type

Port G

Compressed air connection type 2

Port D

Type

Min. working pressure

Max. working pressure

Min. ambient temperature

Max. ambient temperature

Delivery quantity

Weight

Industrial

Archive product: Do not use in new constructions!

Y-Push-in fitting

pin bushing

Ø1/4

Push-in fitting

Ø1/4

QR1-S-MYZ

-0.95 bar

10 bar

0 °C

60 °C

25 piece

0.005 kg

Material

Surface

Housing material

nickel-plated

Polybutyleneterephthalate

Series QR1-S-MYZ Mini

R432000316

Series QR1

2026-03-05


Seal material	Acrylonitrile butadiene rubber
Material tooth lock washer	Stainless Steel
Material release ring	Polyoxymethylene
Material release ring holder	Die cast zinc
	Brass
Surface release ring holder	nickel-plated
Part No.	R432000316

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined.

These pneumatic components with NPT or inch thread dimensions are only available from our US sales organization.

Dimensions in inches

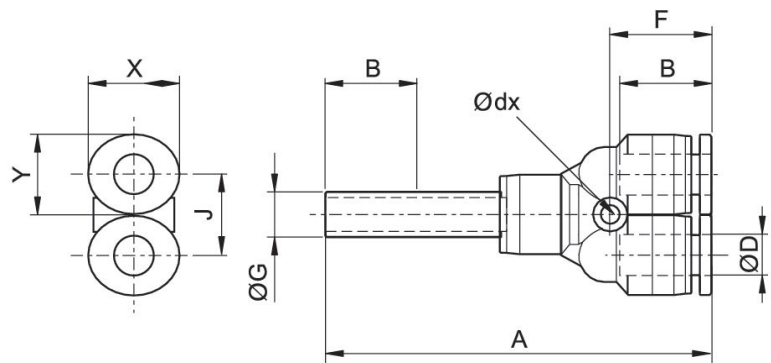

Dimensions in inches

Part No.	Port D	Port G	Ø dx	A	B	F	J	X	Y
R432000324	Ø1/8	Ø1/8	0.13	1.71	0.36	0.32	0.28	0.24	0.01
R432000316	Ø1/4	Ø1/4	0.13	1.99	0.47	0.4	0.47	0.39	0.01