
Check-choke valve, Series QR1-DWB

R432002363

General series information QR1-DWA

■ AVENTICS Series QR1 Check-choke-valve are designed for nominal flows from 60 l/min .. 875 l/min.





Technical data

Industry Industrial
Port 1 10-32 UNF
Port 2 Ø5/32
direction of throttle 1 > 2

Nominal flow Qn 1 to 2 2607.6 l/min

Compressed air connection type 1 push-in fitting

Compressed air connection type 2 External thread

Throttle Exhaust Air Throttling Medium Compressed air

Working pressure min.

0.4827 bar

Working pressure max

10 bar

Min. ambient temperature

0 °C

Max. ambient temperature

60 °C



Min. medium temperature0 °CMax. medium temperature60 °CDelivery unit1 pieceWeight0.009 kg

Material

Housing material Polybutyleneterephthalate
Seal material Acrylonitrile butadiene rubber

Material flow control screw Brass

Surface flow control screw nickel-plated

Material compressed air connection Brass

Part No. R432002363

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!


The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in https://www.emerson.com/en-us/support).



Dimensions in inches

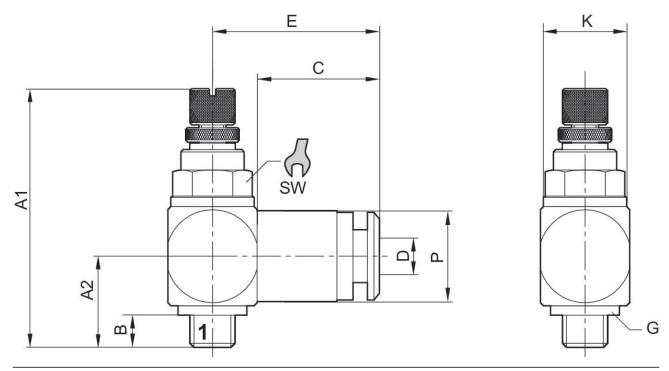

Throttle setting via knurled bolt

Dimensions in inches

Part No.	G	ØD	A1 (max)	A2	В	С	Е	ØK	SW
R432002362	10-32 UNF	Ø1/8	1,044	0.272	0.158	0.355	0.552	0,394	5/16
R432002363	10-32 UNF	Ø5/32	1,044	0.252	0.158	0.461	0.617	0,394	5/16
R432002364	1/8 NPT	Ø5/32	1,418	0.441	0.315	0.461	0.701	0.552	7/16
R432002365	10-32 UNF	Ø1/4	1,044	0.252	0.158	0.473	0.662	0,394	5/16
R432002366	1/8 NPT	Ø1/4	1,418	0.441	0.315	0.473	0.717	0.552	7/16

Part No.	ØР
R432002362	0.256
R432002363	0.315
R432002364	0.315
R432002365	0.411
R432002366	0.411

