

# Base plate

R432015309



## Technical data

**Industry**  
Industrial

**Type**  
Base plate

**Direction of pneumatic port (1)**  
On the side

**Compressed air connection input**  
3/4-14 PTF

**Compressed air connection output**  
3/4-14 PTF

**Frame size**  
ISO 3

**Standards**  
ISO 5599-1

**Working pressure min.**  
3.5 bar

**Working pressure max**  
10 bar

**Min. ambient temperature**  
10 °C

**Direction of pneumatic port (3,5)**  
On the side

**Port exhaust**  
3/4-14 PTF

**Exhaust type**  
Ports separated

**Exhaust (3,5)**  
With directional exhaust (3/5)

**Max. ambient temperature**  
200 °C

**Min. medium temperature**  
10 °C

**Max. medium temperature**  
120 °C

**Medium**  
Compressed air

Mounting screw  
M8

Weight  
0.54 kg

## Material

Material base plate  
Die-cast aluminum

Part No.  
R432015309

## Technical information


The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in <https://www.emerson.com/en-us/support>).

## Dimensions in mm

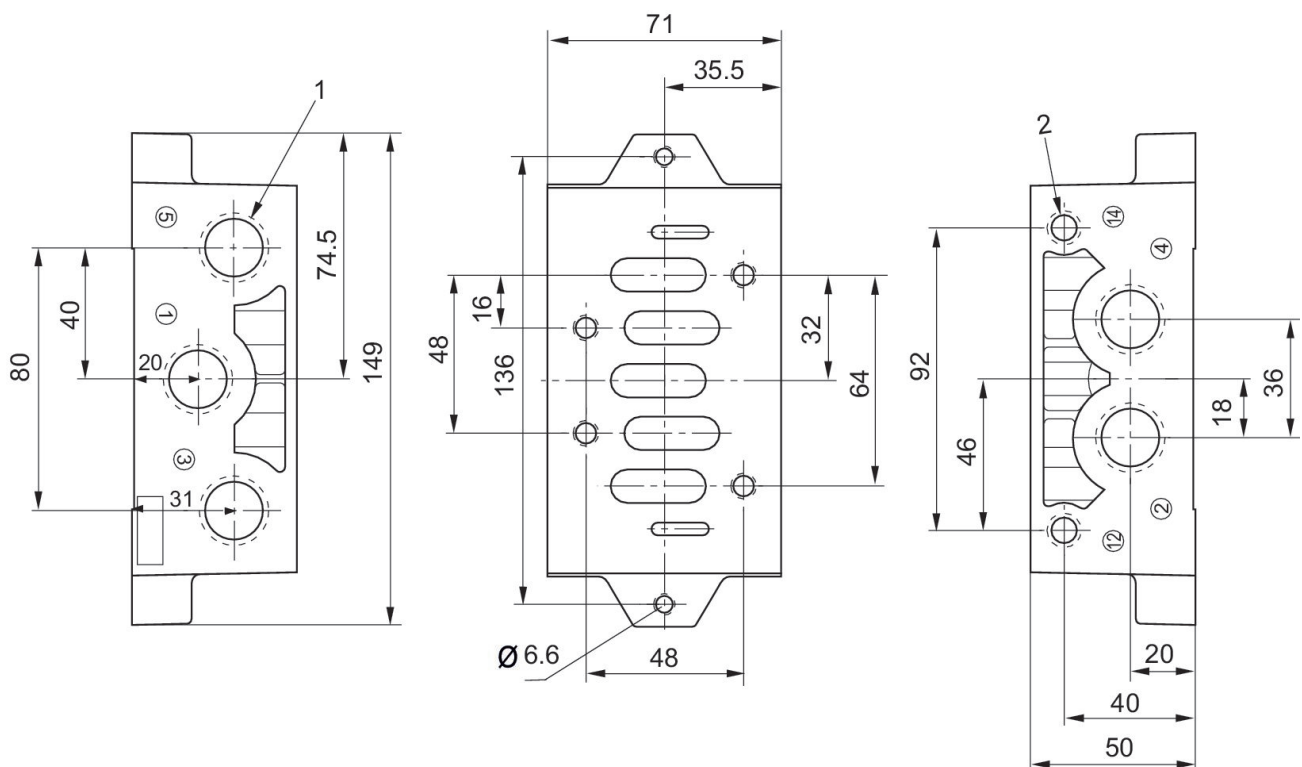

1) Connections [1, 3, 5, 2, 4]  
2) Connections [12, 14] G 1/8