


## AVENTICS Series TRB Tie rod cylinders (ISO 15552)

The AVENTICS Series TRB (ISO 15552) cylinders are among the most frequently implemented in industries where heavy duty cylinders are required, such as wood and aluminium, steel and automotive, heavy-duty machinery and mining to name just a few.



### Technical data

|                                        |                                    |
|----------------------------------------|------------------------------------|
| Industry                               | Industrial                         |
| Piston Ø                               | 80 mm                              |
| Stroke                                 | 50.8 mm                            |
| Ports                                  | 3/8 NPT                            |
| Functional principle                   | Double-acting                      |
| Cushioning                             | Pneumatic adjustable cushioning    |
| Magnetic piston                        | Piston with magnet                 |
| Environmental requirements             | Industry standard<br>ATEX optional |
| Piston rod thread - type               | External thread                    |
| Piston rod thread                      | 3/4-16 UNF                         |
| Scraper                                | Standard Industry Scraper          |
| Pressure for determining piston forces | 6,3 bar                            |
| Retracting piston force                | 2855 N                             |
| Extracting piston force                | 2855 N                             |
| Min. ambient temperature               | -20 °C                             |
| Max. ambient temperature               | 80 °C                              |
| Min. working pressure                  | 2 bar                              |
| Max. working pressure                  | 10 bar                             |
| Cushioning length                      | 19.5 mm                            |

# Tie rod cylinder ISO 15552, Series TRB - inch

TRB

R480177133

2026-07-20

|                                    |                     |
|------------------------------------|---------------------|
| Cushioning energy                  | 54 J                |
| Weight 0 mm stroke                 | 2.67 kg             |
| Weight +10 mm stroke               | 0.099 kg            |
| Stroke max.                        | 2800 mm             |
| Medium                             | Compressed air      |
| Min. medium temperature            | -20 °C              |
| Max. medium temperature            | 80 °C               |
| Max. particle size                 | 50 µm               |
| Min. oil content of compressed air | 0 mg/m <sup>3</sup> |
| Max. oil content of compressed air | 5 mg/m <sup>3</sup> |

## Material


|                       |                      |
|-----------------------|----------------------|
| Piston rod            | Stainless Steel      |
| Scraper material      | Polyurethane         |
| Material tie-rod      | Steel, chrome-plated |
| Seal material         | Polyurethane         |
| Material, front cover | Die-cast aluminum    |
| Cylinder tube         | Aluminum             |
| End cover             | Die-cast aluminum    |
| Nut for piston rod    | Steel, chrome-plated |
| Part No.              | R480177133           |

## Technical information

The pressure dew point must be at least 15 °C less than ambient and medium temperature and may not exceed 3 °C.

The oil content of compressed air must remain constant during the life cycle.

## Cushioning diagram

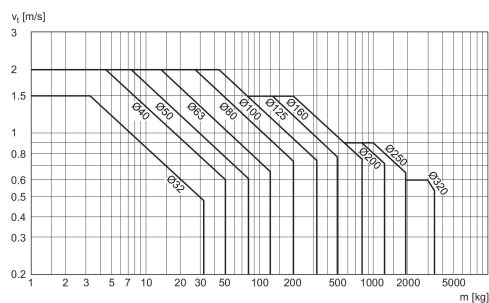

$v_t$  = Piston velocity [m/s]  $m$  = Cushionable mass [kg]

# Tie rod cylinder ISO 15552, Series TRB - inch

R480177133

TRB

2026-07-20

## Overview drawing



NOTE: This overview drawing is only for orientation to indicate where the various accessory parts can be fastened to the cylinder. The illustration has been simplified for this purpose. It is thus not possible to derive the dimensions from this overview.

# Tie rod cylinder ISO 15552, Series TRB - inch

TRB

R480177133

2026-07-20

## Dimensions



S = stroke

# Tie rod cylinder ISO 15552, Series TRB - inch

R480177133

TRB

2026-07-20

## Dimensions in inches

| Part No. Ø [mm] | Ø [inch] | A -0,08 | ØB d11 | BG min. | E    | EE      | KK            | G    | H    | KV   |
|-----------------|----------|---------|--------|---------|------|---------|---------------|------|------|------|
| 32              | 1 1/4    | 0.87    | 1.18   | 0.63    | 1.83 | 1/8 NPT | 7/16 - 20 UNF | 1.09 | 1.87 | 0.63 |
| 40              | 1 1/2    | 0.94    | 1.38   | 0.63    | 2.09 | 1/4 NPT | 1/2 - 20 UNF  | 1.31 | 2.09 | 0.71 |
| 50              | 2        | 1.26    | 1.57   | 0.63    | 2.56 | 1/4 NPT | 3/4 - 16 UNF  | 1.22 | 2.56 | 0.94 |
| 63              | 2 1/2    | 1.26    | 1.77   | 0.63    | 2.95 | 3/8 NPT | 3/4 - 16 UNF  | 1.22 | 2.95 | 0.94 |
| 80              | 3        | 1.57    | 1.77   | 0.67    | 3.74 | 3/8 NPT | 3/4 - 16 UNF  | 1.51 | 3.74 | 1.18 |
| 100             | 4        | 1.57    | 2.17   | 0.67    | 4.53 | 1/2 NPT | 3/4 - 16 UNF  | 1.51 | 4.53 | 1.18 |
| 125             | 5        | 2.13    | 2.36   | 0.79    | 5.51 | 1/2 NPT | 1 - 14 UNF    | 1.66 | 5.51 | 1.61 |

| Part No. Ø [mm] | KW   | ØMM f8 | PL   | L2   | L3 ±0,02 | L8        | RT  | SW   | TG        | VD   |
|-----------------|------|--------|------|------|----------|-----------|-----|------|-----------|------|
| 32              | 0.2  | 0.47   | 0.63 | 0.64 | 0.18     | 3.7±0.02  | M6  | 0.39 | 1.28±0.02 | 0.2  |
| 40              | 0.24 | 0.63   | 0.79 | 0.72 | 0.18     | 4.13±0.03 | M6  | 0.51 | 1.5±0.02  | 0.2  |
| 50              | 0.31 | 0.79   | 0.75 | 0.98 | 0.18     | 4.17±0.03 | M8  | 0.67 | 1.83±0.02 | 0.2  |
| 63              | 0.31 | 0.79   | 0.94 | 0.98 | 0.18     | 4.76±0.03 | M8  | 0.67 | 2.22±0.03 | 0.2  |
| 80              | 0.39 | 0.98   | 0.93 | 1.3  | 0        | 5.04±0.03 | M10 | 0.87 | 2.83±0.03 | 0.2  |
| 100             | 0.39 | 0.98   | 0.98 | 1.42 | 0        | 5.43±0.04 | M10 | 0.87 | 3.5±0.03  | 0.2  |
| 125             | 0.53 | 1.26   | 1.3  | 1.77 | 0        | 6.3±0.04  | M12 | 1.06 | 4.33±0.04 | 0.28 |

| Part No. Ø [mm] | WH     | ZM              |
|-----------------|--------|-----------------|
| 32              | 26±1.4 | 5.75±0.12/0.06  |
| 40              | 30±1.4 | 6.5±0.12/0.06   |
| 50              | 37±1.4 | 7.09±0.12/0.06  |
| 63              | 37±1.8 | 7.68±0.12/0.06  |
| 80              | 46±1.8 | 8.66±0.12/0.06  |
| 100             | 51±1.8 | 9.45±0.08/0.08  |
| 125             | 65±2.2 | 11.42±0.08/0.08 |