


传感器, 系列 SN5-X



AVENTICS™

AVENTICS SN5-X 系列磁性接近传
感器

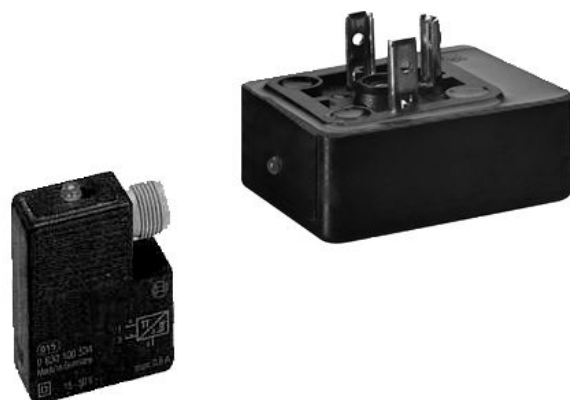



传感器, 系列 SN5-X

安沃驰 SN5-X 系列磁性传感器对铁磁材料有反应，专为焊接应用而设计。

- 传感器对铁磁材料有反应
- 适用于焊接行业的型号
- 脉冲延长型号




传感器, 系列 SN5-X



连接方式型	电气连接 极数	结构	发光二极管状态显示	物料号
电子 PNP	3-针	反极性保护	红色	0830100500
电子 PNP	3-针	反极性保护	红色, 绿色	0830100502


规格

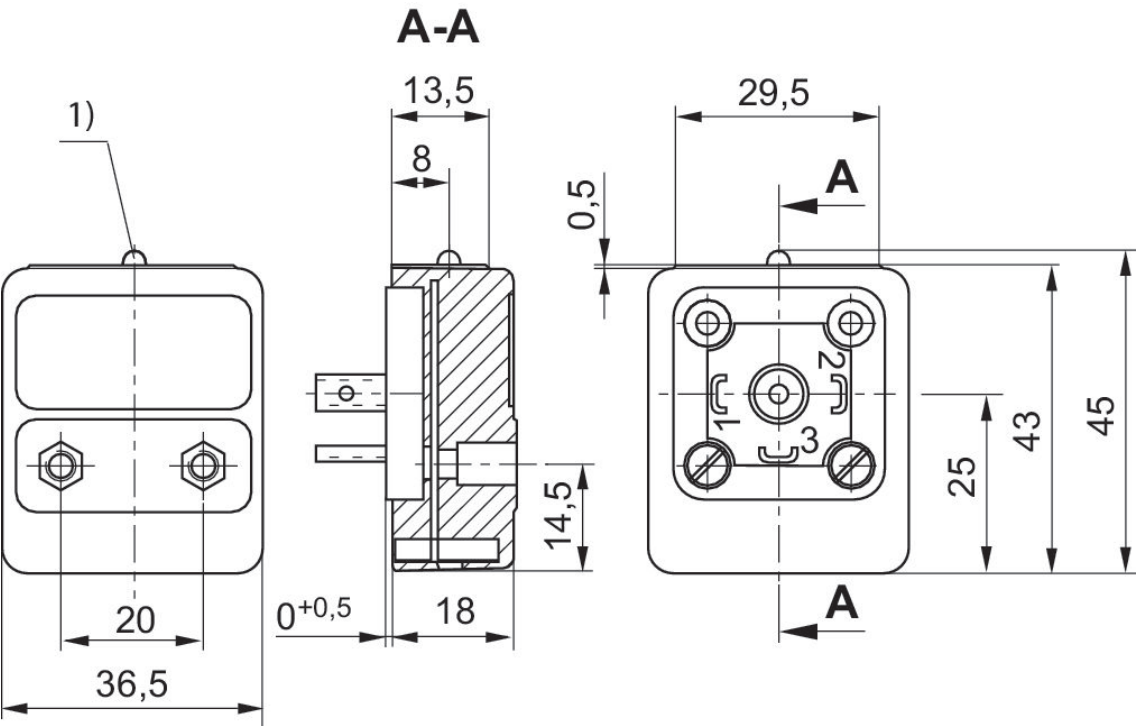

1) 发光二极管


传感器, 系列 SN5-X

多针插头
M12



连接方式型	电气连接 极数	换向电流(开关电流), 直流电, 最大值. [A]	最小工作电压 DC [V DC]	最大工作电压 DC [V DC]	结构	发光二极管状态显示	物料号
电子 PNP	3-针	0.2	15	30	反极性保护	黄色	0830100525
电子 PNP	3-针	0.2	15	30	短路保护, 反极性保护	黄色, 绿色	0830100534

规格

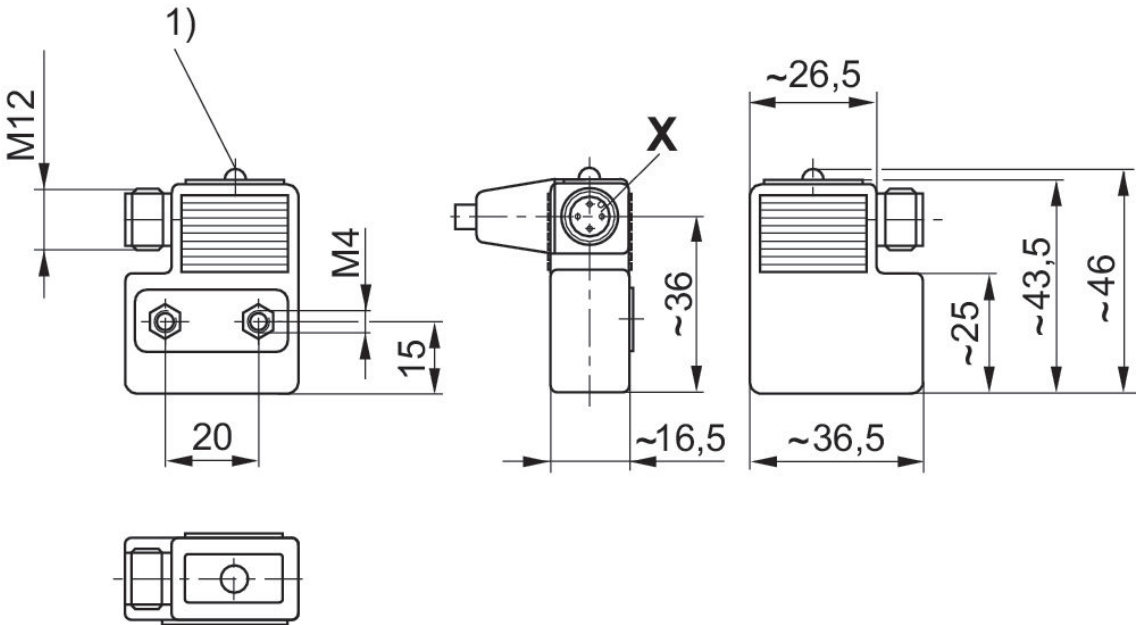


1) 发光二极管

传感器固定设备, 系列 CB1



气缸-Ø 最小., [mm]	气缸-Ø 最大 [mm]	材料	物料号
32	40	铝材	1827020056
50	63	铝材	1827020057
80	100	铝材	1827020058

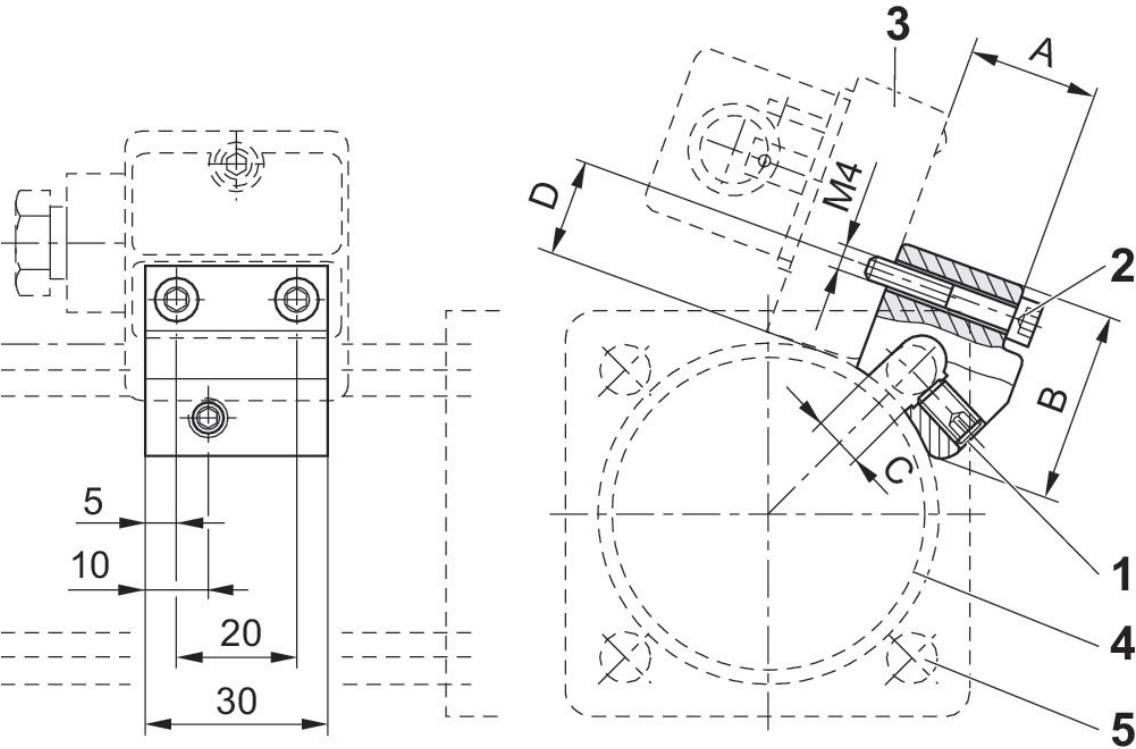


1) 螺纹夹紧销 2) 传感器固定螺钉 3) 传感器 4) 气缸 外形 5) 拉杆

物料号	A	B	C	D	SW
1827020056	19.5	30	6	15	3
1827020057	24.5	30	8	15	3
1827020058	29.5	31	10	15	3

传感器固定设备, 系列 CB1



气缸-Ø 最小., [mm]	气缸-Ø 最大 [mm]	材料	物料号
125	125	铝材	1827020076
160	200	铝材	1827020077
250	250	铝材	1827020078

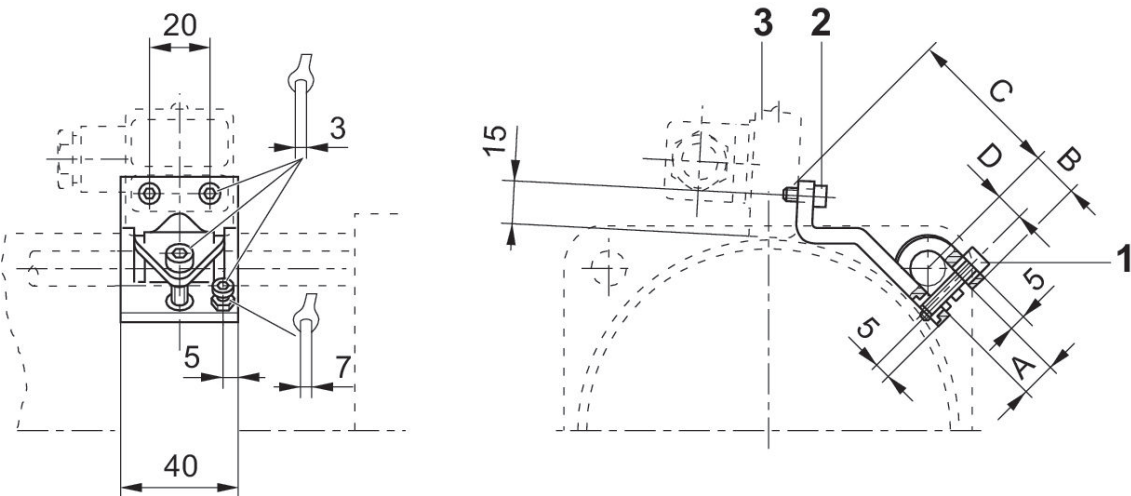


1) 固定螺钉 2) 传感器固定螺钉 3) 传感器

物料号	A +0,5	B ±1	C ±2	D
1827020076	12	15	54	9
1827020077	16	17	53	11
1827020078	20	19	60	13


圆形插头, 系列 CON-RD

多针插头
M12x1
4-针




额定电压	电流，最大值 [A]	电极数目	可连接的电 缆的最小直径 [mm]	可连接的电 缆的最大直径 [mm]	物料号
48 V AC/DC	4	4-针	4	6	1834484177

规格

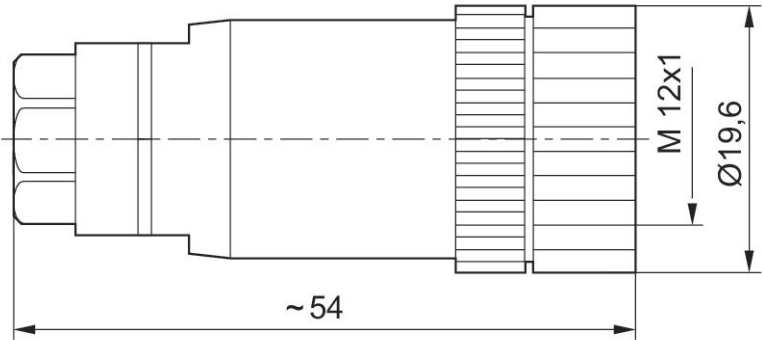


圆形插头, 系列 CON-RD

多针插头
M12x1
4-针




额定电压	电流，最大值 [A]	电极数目	可连接的电缆的最小直径 [mm]	物料号
48 V AC/DC	4	4-针	4	1834484178

规格

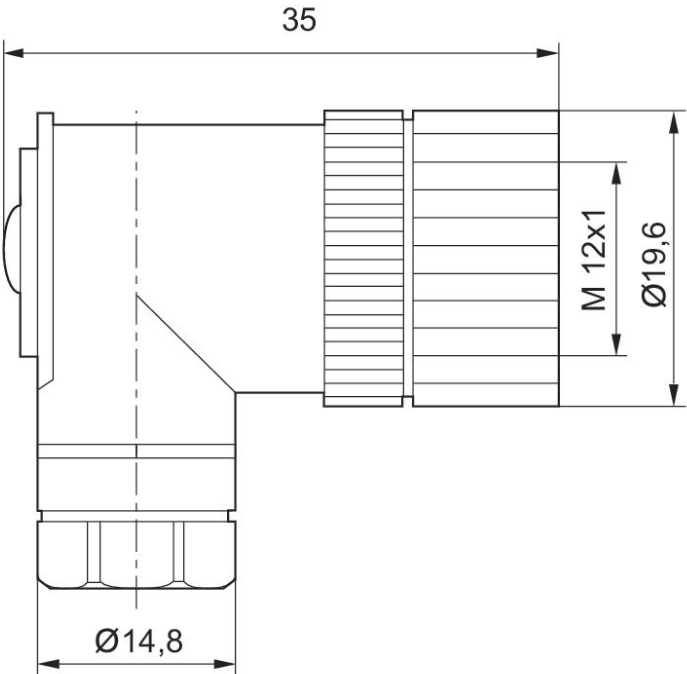


圆形插头, 系列 CON-RD

多针插头
M12x1
5-针




额定电压	电气连接 1, 类型	电气连接 1, 螺纹尺寸	电气连接 2, 类型	电缆长度 [m]	物料号
48 V AC/DC	多针插头	M12x1	开放式电缆终端	3	1834484256
48 V AC/DC	多针插头	M12x1	开放式电缆终端	5	1834484257
48 V AC/DC	多针插头	M12x1	开放式电缆终端	10	1834484258

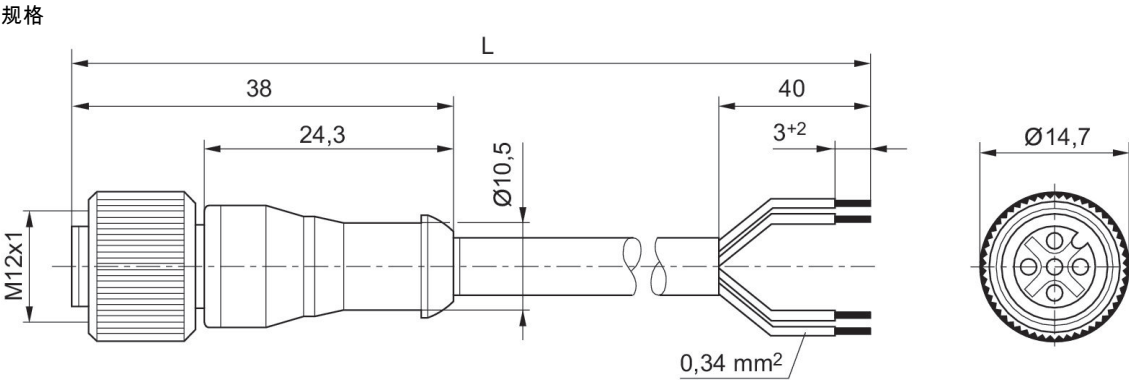

L = 长度


圆形插头, 系列 CON-RD

多针插头
M12x1
5-针



额定电压	电气连接 1, 类型	电气连接 1, 螺纹尺寸	电气连接 2, 类型	电缆长度 [m]	物料号
48 V AC/DC	多针插头	M12x1	开放式电缆终端	3	1834484259
48 V AC/DC	多针插头	M12x1	开放式电缆终端	5	1834484260
48 V AC/DC	多针插头	M12x1	开放式电缆终端	10	1834484261

规格

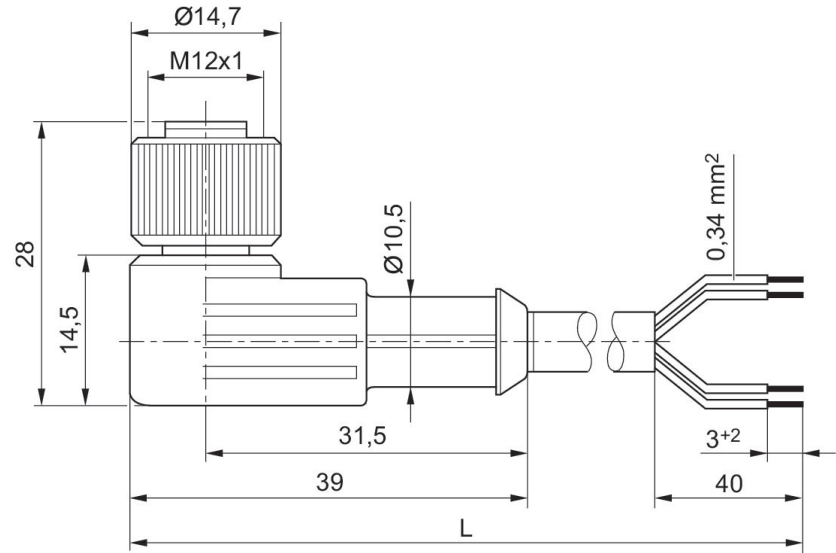

L = 长度


阀连接器，CON-VP 系列

A 型




额定电压	电极数目	电缆直径-Ø [mm]	电缆长度 [m]	物料号
230 V AC/DC	2+E	5.9	3	1834484160

规格

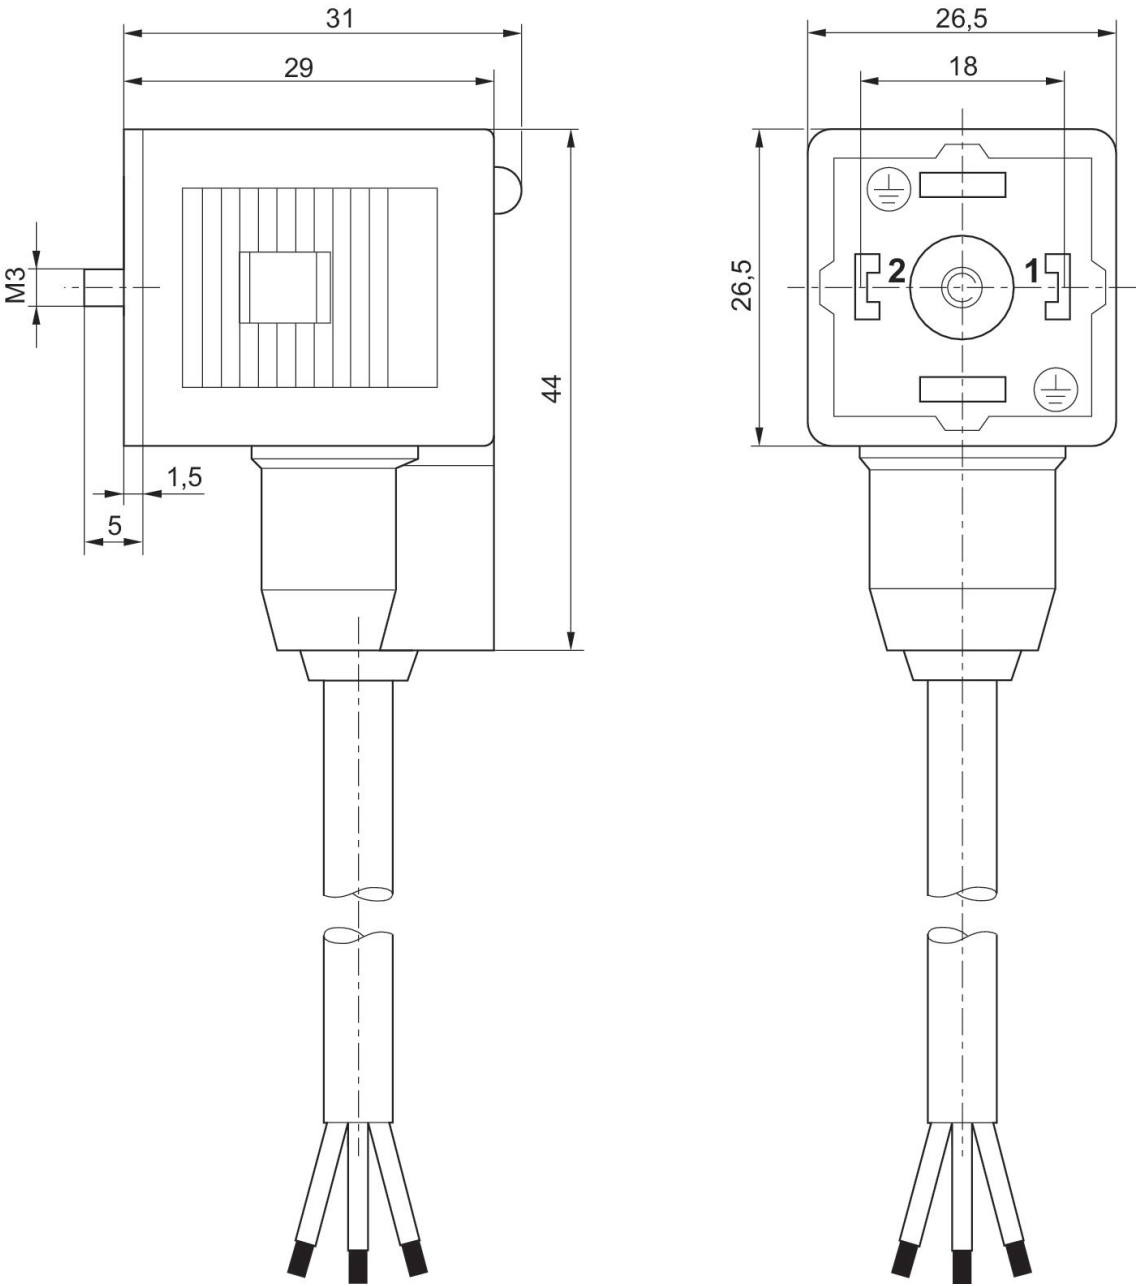

1834484160

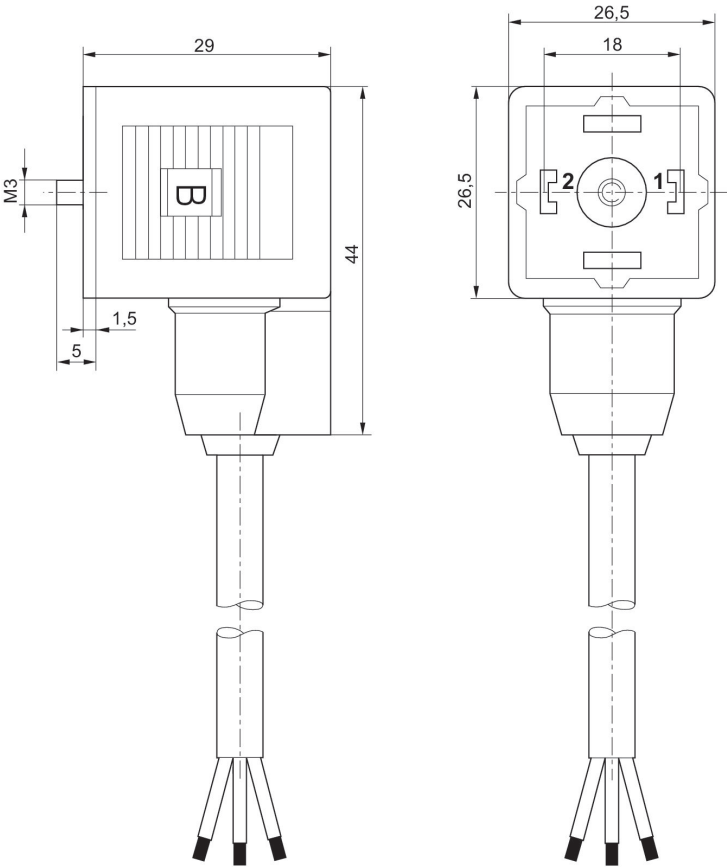


阀连接器，CON-VP 系列

EN 175301-803, A型



额定电压	电流，最大值 [A]	电极数目	可连接的电 缆的最小直径 [mm]	可连接的电 缆的最大直径 [mm]	物料号
300 V DC / 250 V AC	10	3+E	4	9.5	1834484059

1834484059

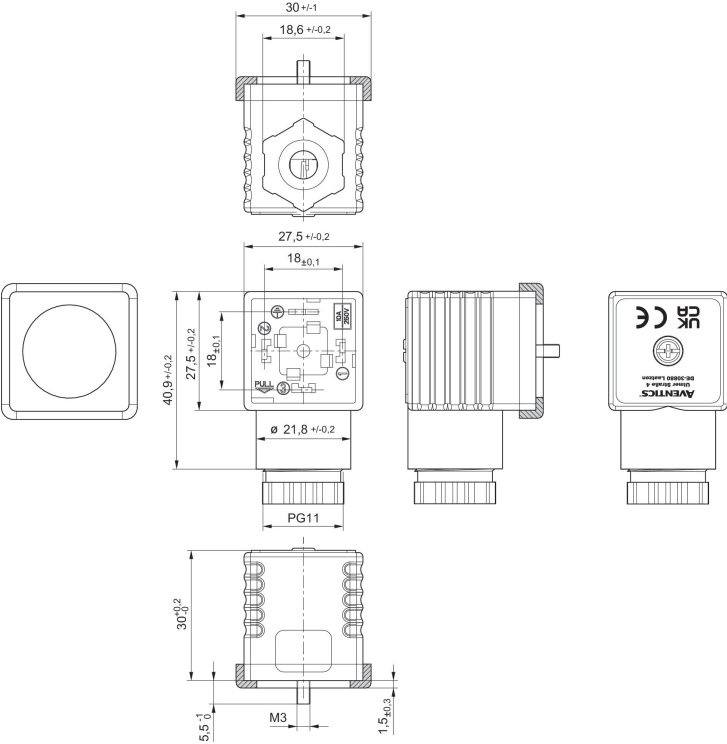

表层密封

Efficient pneumatic solutions, our program:
cylinders and drives, valves and valve systems,
air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2019 Emerson Electric Co. All rights reserved.



CONSIDER IT SOLVED™