

AVENTICS Series NU2 Fittings with tube nuts

AVENTICS Series NU2, are a complete range of plastic and Brass fittings with tube nuts, Versatile and safe NU2 fittings with nuts benefit of a large selection of connection type.




Technical data

Industry	Industrial
Fitting type	Swivel banjo connection 1-fold
Compressed air connection type	External thread
Port G	G 1/4
Compressed air connection type 2	plug-in with tube nut
Port D	Ø 9
Type	NU2-S-RW1
Min. working pressure	-0.95 bar
Max. working pressure	15 bar
Min. ambient temperature	-10 °C
Max. ambient temperature	70 °C
Delivery unit	2 piece
Weight	0.054 kg

Material

Housing material	Brass
Surface housing	nickel-plated
Seal material	Polyvinyl chloride
Part No.	1823391042

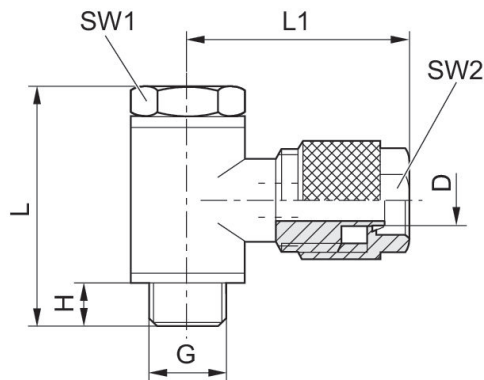

Part No.	Port D	Port G	H	L	L1	SW 1	SW 2
1823391068	$\varnothing 3$	M5	4.5	17.5	16.5	8	8
1823391035	$\varnothing 4$	M5	4.5	17.5	16.5	8	9
1823391069	$\varnothing 3$	G 1/8	6.5	28	21	14	8
1823391000	$\varnothing 4$	G 1/8	6.5	28	23	14	10
1823391001	$\varnothing 6$	G 1/8	6.5	28	23	14	12
1823391002	$\varnothing 4$	G 1/4	6.5	29.5	26	17	10
1823391003	$\varnothing 6$	G 1/4	6.5	29.5	26	17	12
1823391042	$\varnothing 9$	G 1/4	7.7	36.7	26	17	15
1823391040	$\varnothing 6$	G 3/8	7	36	26	19	12
1823391041	$\varnothing 9$	G 3/8	7	36	30	19	15

Connection D = inside diameter of the tubing to be used