


Manifold strip, Series TC08

R422000935

Series

TC08

2025-03-06

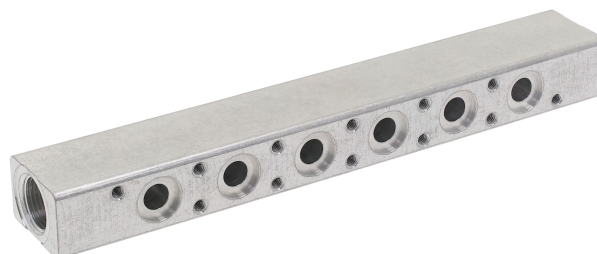

Technical data

Industry

Industrial

Type

Manifold strip

For series

TC08

Type

Manifold strip

Nominal flow Qn

800 l/min

Min. ambient temperature

-10 °C

Max. ambient temperature

50 °C

Medium

Compressed air

Number of valve positions

6

Weight

0.247 kg

Material

Material base plate

Aluminum

Seal material

Acrylonitrile butadiene rubber

Part No.

R422000935

Manifold strip, Series TC08


R422000935

Series

TC08

2025-03-06

Mounting on manifold strip

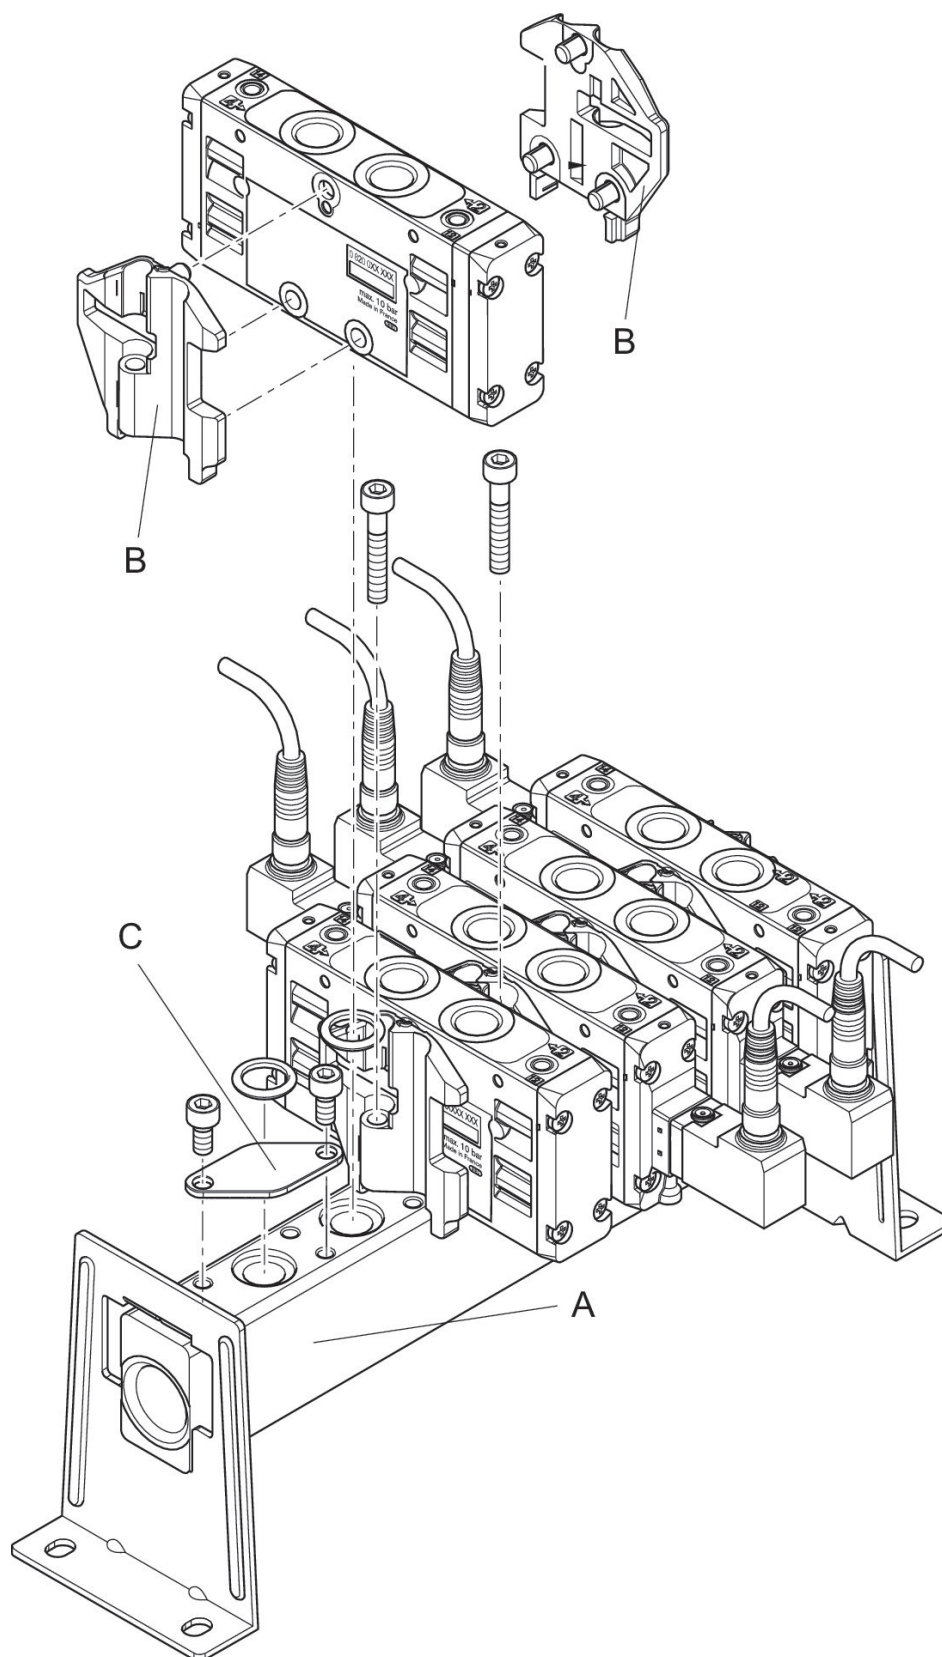

The following must be ordered to mount the valves: manifold strip A, mounting kit B (R422000937), Blanking plate C (R422000939)

Manifold strip, Series TC08


R422000935

Series
TC08

2025-03-06

Dimensions in mm

P strip with mounting bracket, horizontal installation

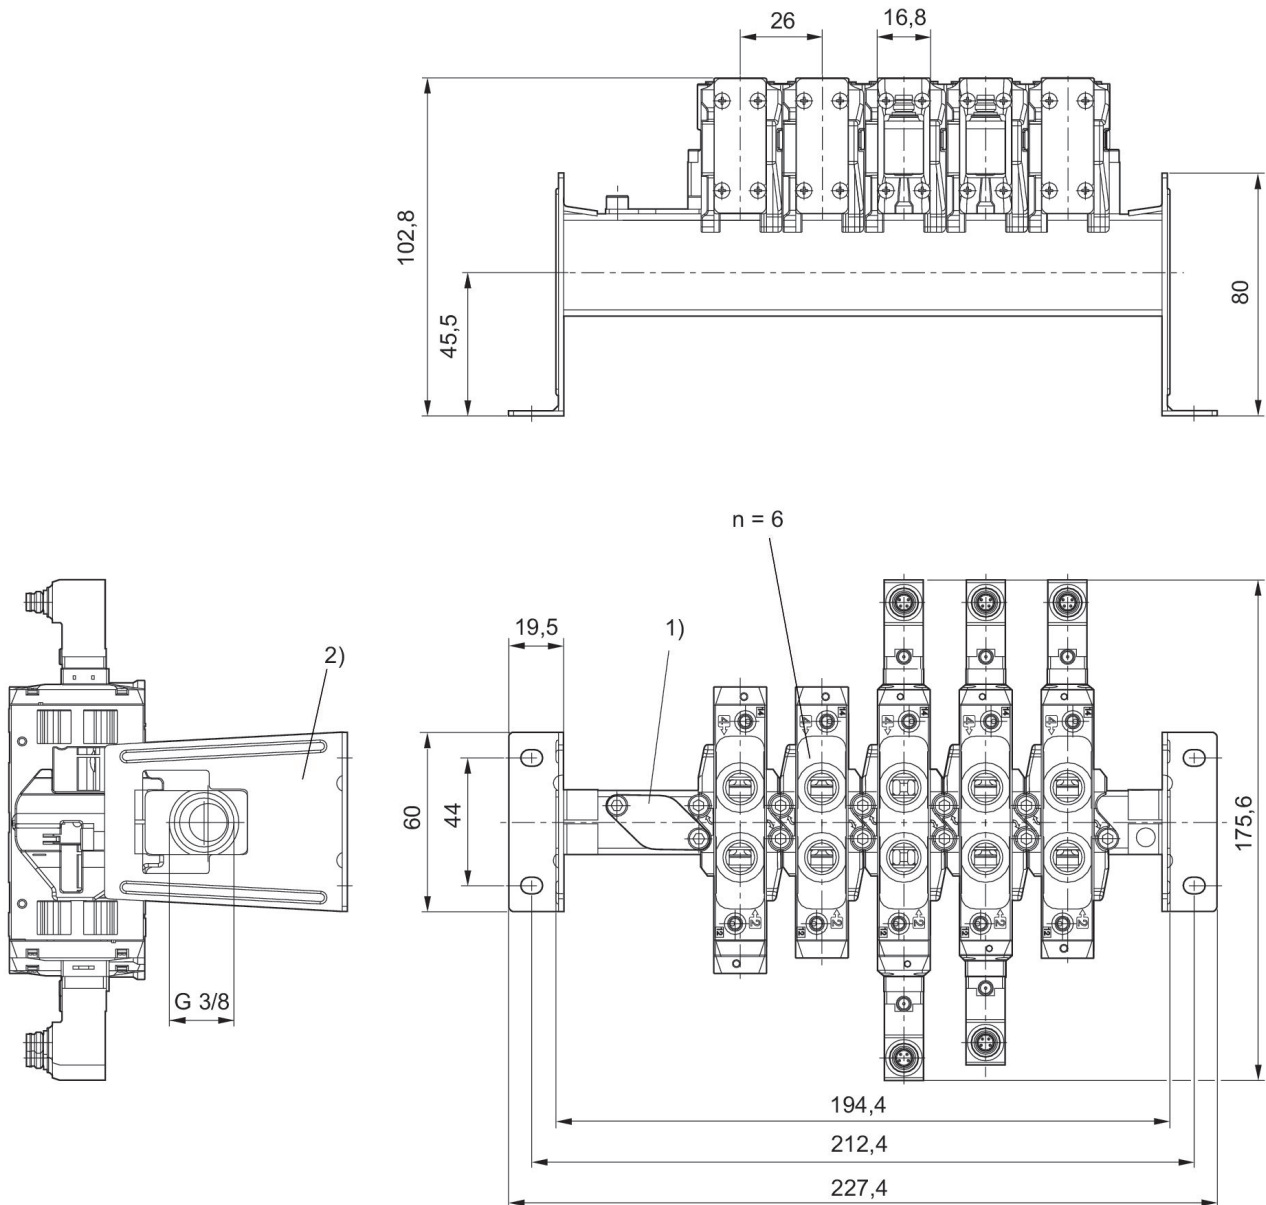

1) Blanking plate

2) Please order mounting bracket 1821332048 separately.

n = number of valve positions

Dimensions in mm


Manifold strip, Series TC08

R422000935

Series
TC08

2025-03-06

P strip with mounting bracket, vertical installation

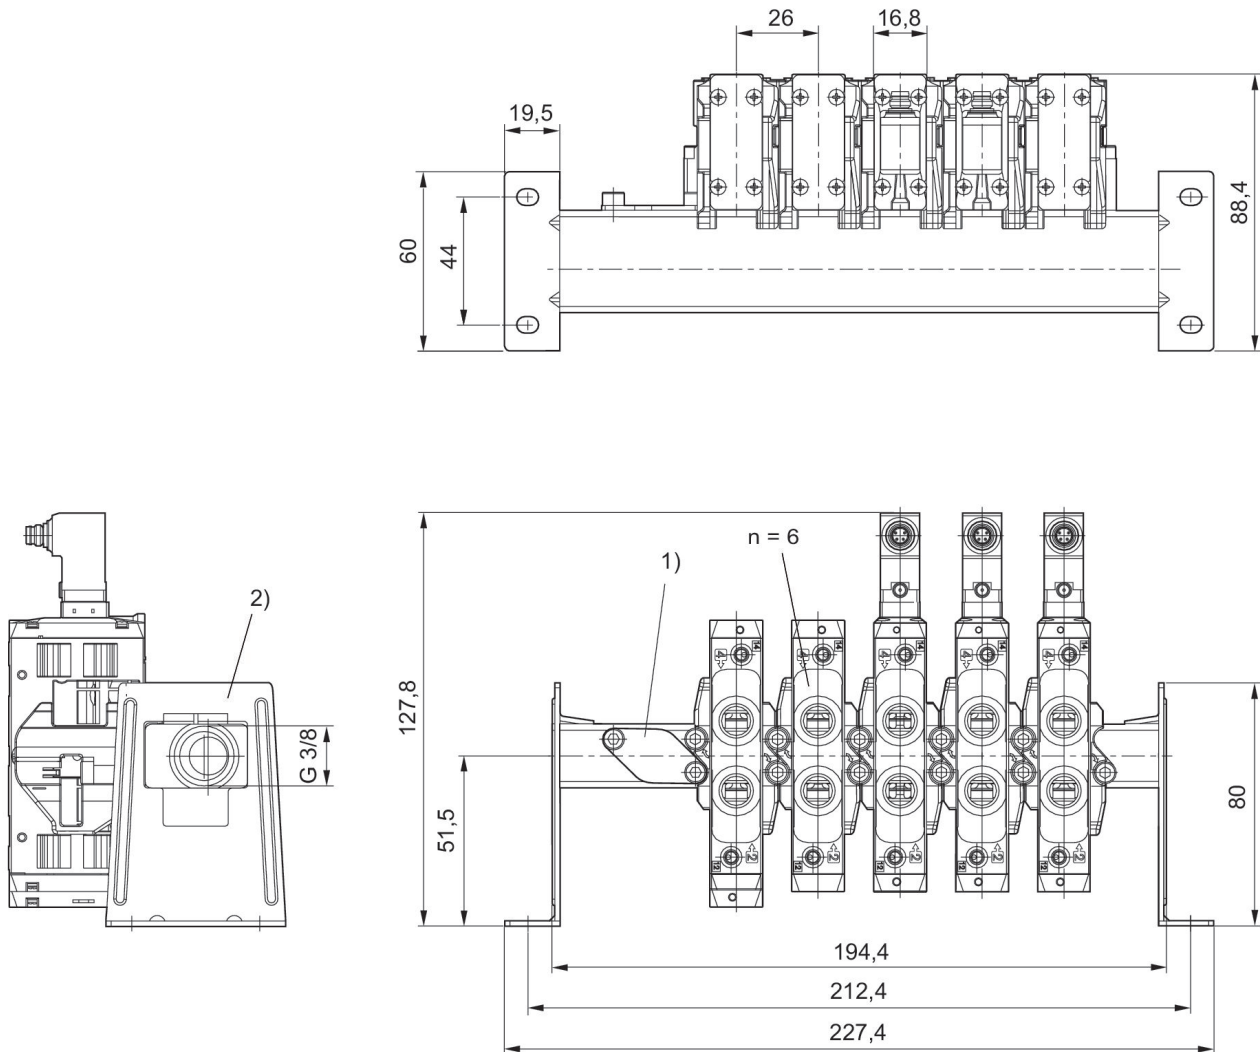

1) Blanking plate

2) Please order mounting bracket 1821332048 separately.

n = number of valve positions

Vertical installation not possible with 5/2 directional valves, electrically operated on each side and 5/3 directional valves, electrically operated.

Dimensions in mm




Manifold strip, Series TC08

R422000935

Series
TC08

2025-03-06

p-strip with support bracket

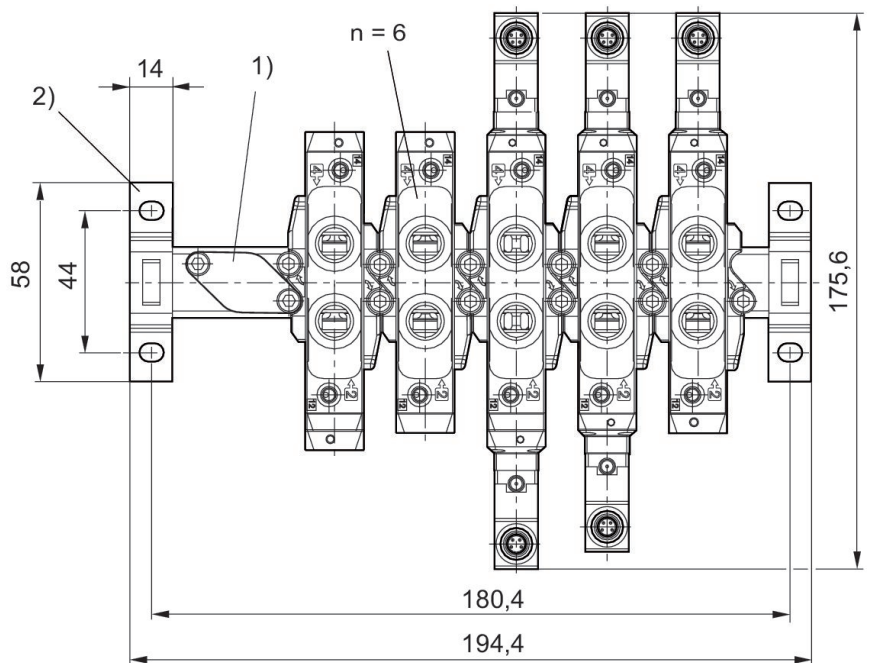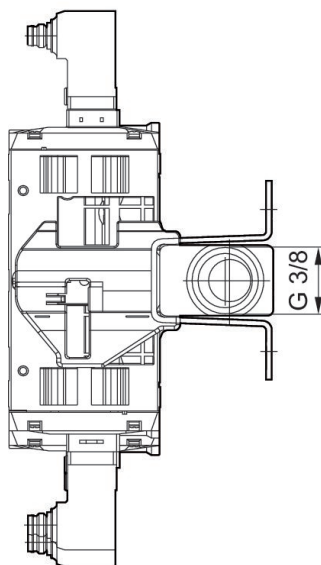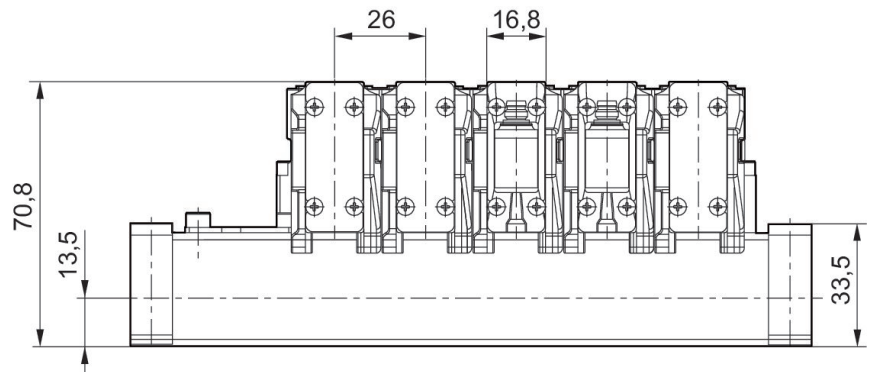

1) Blanking plate

2) Please order mounting clip 1821332049 separately.

n = number of valve positions