
Guide unit GU1, Series CG1

0821401096

AVENTICS Guide units

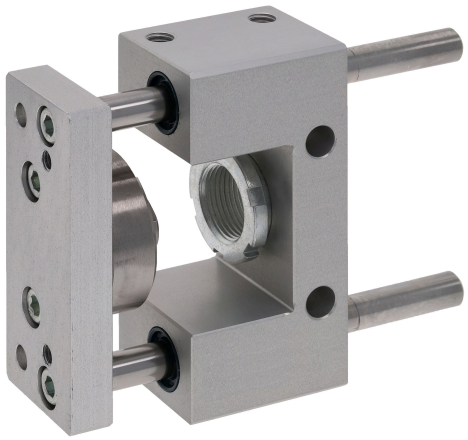

Technical data

Industry	Industrial
Piston Ø	12 mm
Stroke	100 mm
Bearing type	Plain bearing
For standard cylinders	ISO 6432
Min. ambient temperature	-20 °C
Max. ambient temperature	80 °C
Weight 0 mm stroke	0.247 kg
Weight +10 mm stroke	0.0078 kg

Material

Bearing housings	Aluminum
Surface bearing housing	colorless anodized
Bearing type	Sintered bronze
Carrying plate	Aluminum
Surface carrying plate	colorless anodized
Material flexible coupling in carrying plate	Stainless Steel
Material guide rods	Hardened heat-treated steel
Surface guide rods	ground

Guide unit GU1, Series CG1


0821401096

Part No.	0821401096

Technical information

Guide units for cylinder Ø 12 also fit on cylinder Ø 16

Dimensions

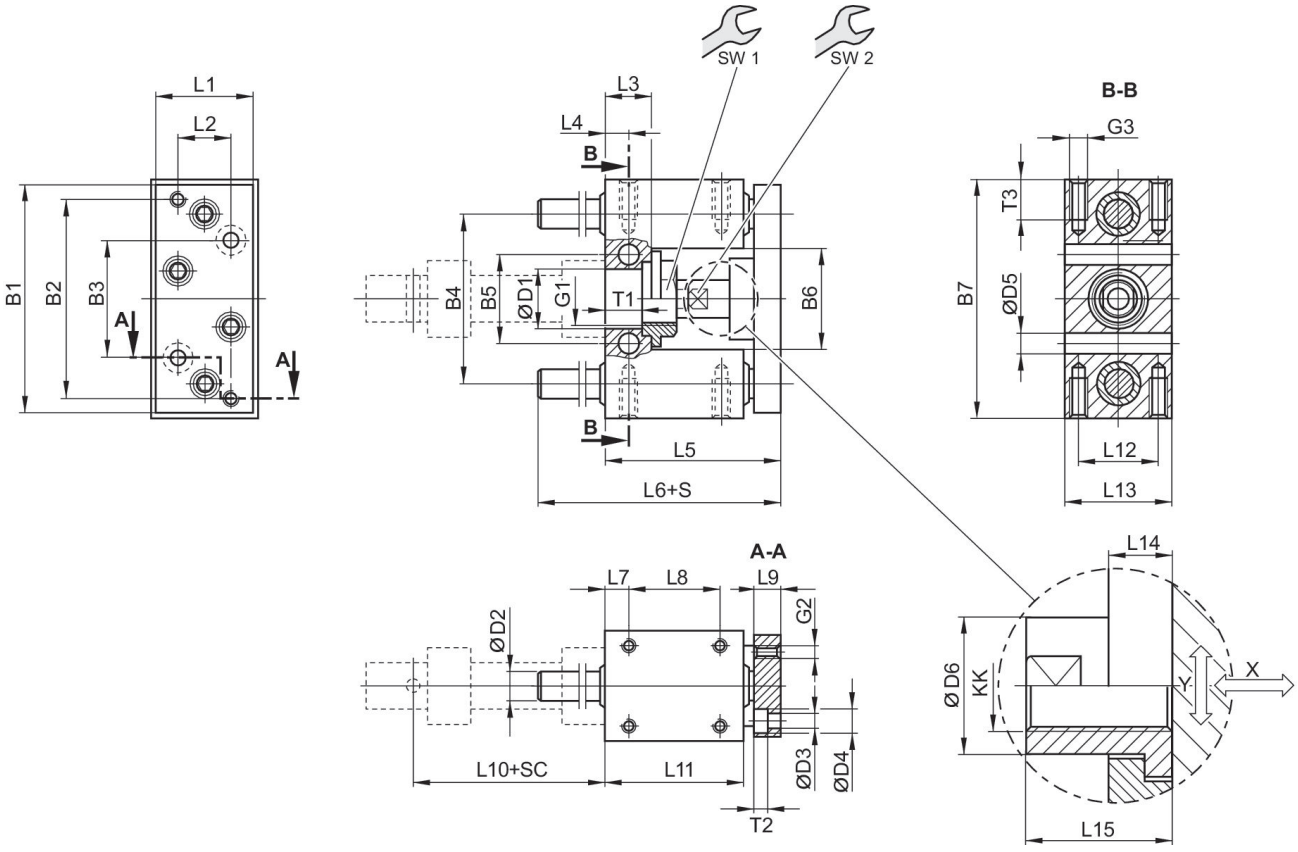

S = stroke
SC = cylinder stroke
X = max. play (axial)
Y = min. play (radial)


Piston Ø	B1	B2	B3	B4	B5	B6	B7	D1	D2	D3
12	63	54	32	46	24	27	65	16 H7	8	4.5

Piston Ø	D4	D5	D6	G1	G2	G3	KK	L1	L2	L3
12	8	5.5	10	M16x1,5	M4	M4	M6	27	15	13

Piston Ø	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13
12	6.5	53	73	6.5	25	10	52.6	38	22	30


Piston Ø	L14	L15	SW1	SW2	T1	T2	T3
12	7	18	19	8	10.6	4.6	8

Useful load

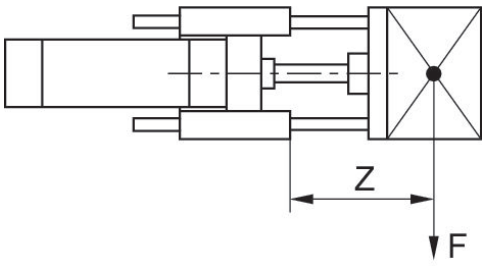

F = Useful load, Z = Projection

Useful load

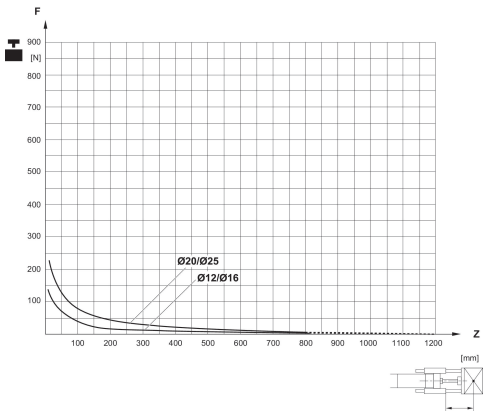

F = Useful load, Z = Projection